

Fisher® HP Series Control Valves

HP (Globe Valve) HPA (Angle Valve)

- Balanced High-Temperature Trim
- Balanced Tight Shutoff Trim
- Unbalanced Trim

Fisher HP Series control valves are single-port, high-pressure, globe- or angle-style valves with metal seats, cage guides, and push-down-to-close valve plug action.

These valves are designed for high-pressure applications in process control industries such as power generation, hydrocarbon production, chemical processing, and refining.

HP Series valves are designed with corrosion allowance; NACE compliant materials are available. Extra valve body wall thickness provides a safety margin of protection against erosion, as well as extra protection against corrosion due to chemical attack. Because these valves feature a thicker valve body wall, they are available in higher intermediate ratings with weld-end fittings.

Unless otherwise noted, all NACE references are to NACE MR0175-2002 and MR0103.

Balanced High-Temperature Trim

HPD

These valves use a balanced valve plug with graphite piston rings and are well suited for general applications with process temperatures in excess of 232°C (450°F), where extremely tight shutoff is not required.



X0183-1

FISHER HP VALVE WITH 667 ACTUATOR AND FIELDVUE™
DVC6200 DIGITAL VALVE CONTROLLER

Balanced Tight Shutoff Trim

HPT and HPAT

These valves use a balanced valve plug and offer excellent shutoff with process temperatures below 232°C (450°F). The temperature limits of HPT can be extended above 232°C (450°F) to 316°C (600°F) by using PEEK (PolyEtherEtherKetone) anti-extrusion rings in combination with a spring-loaded PTFE seal. The PEEK anti-extrusion rings expand to help close off the clearance gaps on the plug outside diameter and the cage inside diameter where the PTFE seal may extrude at high temperatures and pressures.



Specifications

Available Configurations⁽¹⁾ and Valve Sizes

See table 1

Common Characteristics: Designed according to: ■ ASME B16.34 Valve-Flanges, Threaded and Welding End and ■ ANSI/ISA-75.08.06

End Connections Styles⁽¹⁾

See table 1

Maximum Inlet Pressure and Temperature^(1,2)

Flanged, Socketwelding, or Buttwelding: Consistent with CL900, 1500, and 2500 according to ASME B16.34, unless limited by maximum pressure drop or material temperature capabilities

In addition, both steel HP and HPA valves with BWE and SWE connections have increased pressure/temperature ratings as shown in table 3

Maximum Pressure Drop⁽¹⁾

Valve with Standard Cage: See figure 12.

Valve with Cavitrol™ III Cage: 149 bar (2160 psi) for two-stage and 207 bar (3000 psi) for three-stage cage. Consult Fisher Bulletin 80.2:030, Cavitrol III One-, Two-, and Three-Stage trims, for more information

Valve with Whisper Trim™ III Cage:

- 0.6 $\Delta P/P_1$ maximum for levels A1 and A3
- 0.75 $\Delta P/P_1$ maximum for levels B1 and B3
- 0.85 $\Delta P/P_1$ maximum for levels C1 and C3
- 0.99 $\Delta P/P_1$ maximum for levels D1 and D3

Valve with WhisperFlo™ Trim:

- **Levels X, Y, and Z:** 0.94 $\Delta P/P_1$ maximum. If greater than 0.94 $\Delta P/P_1$, consult your Emerson Process Management sales office

Shutoff Classifications

See table 4

Construction Materials

Valve Body and Bonnet:

- WCC steel⁽³⁾, ■ WC9 Cr-Mo steel⁽³⁾, ■ C12A

chrome-moly alloy, ■ CF8M stainless steel, and ■ LCC for low temperature service

Trim: See table 12

Other Parts: See table 7

Consult your Emerson Process Management sales office for special trim and valve body material availability.

Material Temperature Capabilities⁽¹⁾

HPD, HPS, and HPAS: Up to 566°C (1050°F) unless limited (see tables 7 or 12 and figure 12)

HPT and HPAT: Up to 232°C (450°F) unless limited (see tables 7 or 12 and figure 12)

Flow Characteristics⁽⁴⁾

Standard Cages: ■ Linear, ■ equal percentage, ■ modified equal percentage⁽⁵⁾

Cavitrol III and Whisper Trim III Cages: Linear

Micro-Flute: Equal percentage

Micro-Flat: Linear

Micro-Form: ■ Equal percentage, ■ modified equal percentage

Flow Direction

Standard Cage

- **HPD:** Normally flow down
- **HPS, HPAS:** Normally flow up⁽⁶⁾
- **HPAS Micro-Flat:** Flow down
- **HPS, HPAS Micro-Form:** Flow up only
- **HPT, HPAT:** Normally flow down
- Cavitrol III Cage:** Flow down
- Whisper Trim III Cage:** Flow up

Flow Coefficients

See table 2, the section titled Coefficients in this bulletin, and also Catalog 12

Noise Levels

See Catalog 12, Section 3 for noise prediction methods

Port Diameters, Valve Plug Travel, and Stem Diameters

See tables 5, 8, 9, and 11

- continued -

Specifications (continued)

Bonnet Style and Mounting⁽¹⁾

■ **Standard Bonnet:** See figure 1

Yoke Temperature Limit: Standard bonnet with cast iron yoke is limited to 537°C (1000°F)

■ **Optional Style 1—Extension Bonnet:** Used for NPS 1 and 2 valves for CL900 or 1500, and NPS 1 valves for CL2500 (see figures 14 and 15)

Packing Arrangements

■ Single, ■ Double, and ■ Leakoff standard packing, or optional ■ ENVIRO-SEAL™ and ■ HIGH-SEAL packing systems. See figure 4. Also see bulletin 59.1:061, ENVIRO-SEAL and HIGH-SEAL Packing System for Sliding-Stem Valves

Yoke Boss Diameter for Actuator Mounting

See tables 5 and 10, and figures 13, 14, and 15

Approximate Weight

See table 6

Options⁽¹⁾

■ Valves with weld-end fittings have increased pressure/temperature ratings, called intermediate ratings⁽⁷⁾. ■ Class V⁽⁶⁾ shutoff for HPT to 316°C (600°F) using PEEK anti-extrusion rings⁽⁸⁾, ■ Class V shutoff for HPD to 593°C (1100°F) using C-seal trim, ■ expanded ends⁽⁷⁾ for NPS 4 and 6 valves (NPS 4 valves are available with NPS 6 ends, and NPS 6 valves are available with NPS 8 ends), ■ lubricator or lubricator/isolating valve⁽⁷⁾

1. The pressure/temperature limits in this bulletin and any applicable standard limitations should not be exceeded.
2. EN (or other valve body material) ratings and end connections can usually be supplied; consult your Emerson Process Management sales office.
3. SA-105 and SA-182-F22 are used for CL2500 HPA valves instead of WCC and WC9.
4. Special characterized cages are available. Contact your Emerson Process Management sales office.
5. Modified equal percentage characteristic is equal percentage for the first 75% of travel, then opens quickly for additional capacity.
6. HPS valves may be used flow down for on-off service only. HPAS valves may be used for flow down in erosive service.
7. For more information contact your Emerson Process Management sales office.
8. Required for all boiler feedwater applications.

Table of Contents

Balanced High-Temperature Trim	1	Installation	7
Balanced Tight Shutoff Trim	1	Packing	9
Specifications	2	Trim Selection Guidelines	15
Unbalanced Trim	4	Trim Material Combinations	17
Expanded Ends	4	Pressure/Temperature Limits for	
Cavitrol, Whisper Trim		Trim Material Combinations	18
and WhisperFlo Cages	4	Dimensions	19
Features	4	Coefficients	24
Material Selection Guidelines	7		

Figure 1. Fisher HPD Valve Assembly (NPS 2 to 6)


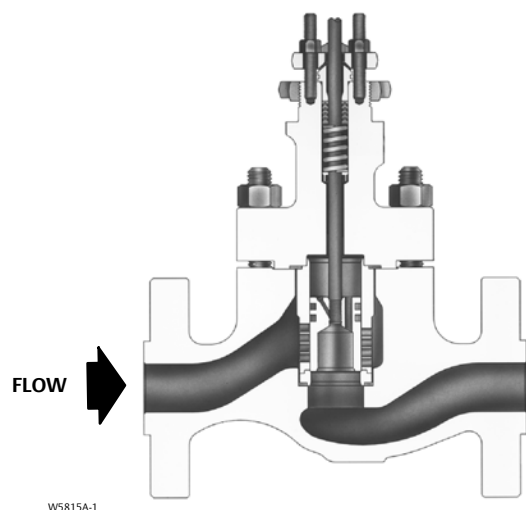


Figure 2. Typical WhisperFlo Trim Cut Section View for Fisher HP Valve

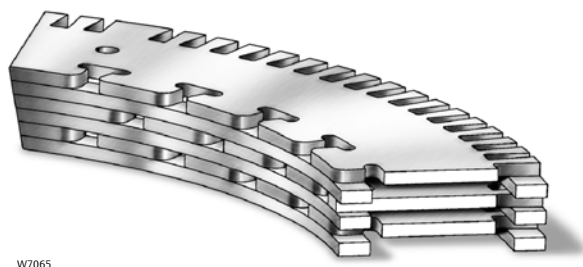

Unbalanced Trim

HPS and HPAS

These valves have an unbalanced plug and provide excellent shutoff.

Expanded Ends

Expanded ends are available on the NPS 4 and 6 CL900 and 1500 HP valves. The NPS 4 HP valve body is offered with NPS 6 ends. The NPS 6 valve body is offered with NPS 8 ends. Both flanged and butt weld end valve bodies are offered with expanded ends.

Cavitrol III, Whisper Trim III, and WhisperFlo Cages

To eliminate cavitation damage in a properly-sized valve, a Cavitrol III cage is available with HPS, HPAS, HPT, and HPAT control valves.

To help attenuate aerodynamic noise in gaseous service, Whisper Trim III and WhisperFlo (figure 2) cages are available with HPD, HPS, HPAS, HPT, and HPAT control valves. Contact your Emerson Process Management sales office for more information.

Features

- **Valve Plug Stability**—Rugged cage guiding provides increased valve plug stability, which reduces vibration and mechanical noise.
- **Full Pressure Drop Capability**—Rugged construction allows full pressure drop capability in HP series valves.
- **Spiral-Wound Gaskets for Excellent Sealing Under All Service Conditions**—Premium materials are used in the construction of spiral-wound gaskets for HP Series valves. These premium materials, which make up the standard spiral-wound gaskets, are N06600 (alloy 600)/graphite or N07750 (alloy X750)/graphite.
- **Compliance with the Clean Air Act**—Optional ENVIRO-SEAL packing systems (figure 4) provide an improved stem seal to help prevent the loss of valuable or emission of hazardous process fluid. The ENVIRO-SEAL packing systems feature PTFE or graphite ULF.
- **Piping Economy**—The availability of expanded end connections on NPS 4 and 6 HP valves may eliminate the need for line swages while accommodating oversized piping arrangements.
- **Quick Change Trim**—Maintenance is simple and can easily be performed using common tools. Trim components can be quickly removed and changed with no need for special tools.
- **Standard Hard Trim Materials**—The cage, valve plug, and other trim parts are manufactured from

hardened materials. This standard feature provides excellent wear resistance.

■ **Control of Low Flow Rates/Tight**

Shutoff—Micro-Flute and Micro-Form valve plugs (figures 6 and 7, respectively) provide superb rangeability in high-pressure, low-flow applications, while maintaining tight shutoff (table 4). A choice of several restricted port diameters helps to match valve body capacity to required flow, to provide necessary control with full travel, and to prevent throttling near the seat.

In low-flow applications where cavitation damage may occur, the Micro-Flat valve plug can be used with a special Cavitrol III cage. Contact your Emerson Process Management sales office for more information.

- **Increased Pressure/Temperature Ratings**— HP Series valves with weld-end fittings have increased pressure/temperature ratings, called intermediate ratings, as defined in ASME B16.34. The extra strength of these valves allows ratings higher than the standard CL900 or 1500 ratings specified in

B16.34. Contact your Emerson Process Management sales office for further information on intermediate ratings.

- **Trim Interchangeability**—Cavitrol III, Whisper Trim III, and WhisperFlo trims (figures 8, 9, and 10) are interchangeable with standard trims.
- **Smooth Control at High Pressure Drops**—Available on NPS 2 through 6 valves, balanced trim provides smooth control at high pressure drops.
- **High-Temperature Capability with Class V Shutoff**—Use of C-seal trim (see figure 5) permits Class V shutoff up to 593°C (1100°F) for HPD valves.
- **Sour Service Trims Available**—Long-lasting, erosion- and corrosion-resistant trims are available for control of sour service. These trims are offered with either a standard cage, a Cavitrol III cage, a Whisper Trim III cage, or WhisperFlo trim. Spiral-wound gasket construction is standard.

Table 1. Available Constructions

DESIGN	VALVE SIZE, NPS	PRESSURE RATING	VALVE BODY MATERIAL AND END CONNECTION STYLE ^(1,2)		
			WCC, WC9, LCC, and C12A Cast Steel Valves	CF8M (316 Stainless Steel) Valves	SA-105, SA-182-F22, and SA-182-F316 forged SST (for forged steel HPA CL2500 angle valves)
			RF or RTJ Flanged, Butt Weld, and Socket Weld ⁽³⁾	RF or RTJ Flanged and Socket Weld ⁽³⁾	Socket Weld
HPAS	1 to 2	CL900 and 1500	X	X	---
		CL2500	---	---	X
HPAT	1 to 2	CL900 and 1500	X	X	---
		CL2500	---	---	X
HPD	2 to 6	CL900 and 1500	X	X	---
	2	CL2500	X	X	---
HPS	1 to 3	CL900 and 1500	X	X	---
	1 to 2	CL2500	X	X	---
HPT	2 to 6	CL900 and 1500	X	X	---
	2	CL2500	X	X	---

X = Available Construction.
1. End connection style abbreviations: RF - Raised Face, RTJ - Ring Type Joint.
2. EN (or other valve body material) ratings and end connections can usually be supplied; consult your Emerson Process Management sales office.
3. Socket Weld available on NPS 1, 1-1/2, and 2 only.

Table 2. Typical Flow Coefficients⁽¹⁾

Valve Size, NPS	Valve Style	Characteristic	Maximum Cv
1	HP	Modified Equal Percentage	15.4
2	HP	Linear	55.3
3	HP	Linear	127
4	HP	Linear	201
6	HP	Linear	425
1	HPA CL1500	Modified Equal Percentage	17
2	HPA CL1500	Linear	76
1	HPA CL2500	Modified Equal Percentage	14.3
2	HPA CL2500	Linear	47.4

1. See the section titled Coefficients in this bulletin and also Catalog 12 for a complete listing of flow coefficients.

Table 3. Increased Pressure/Temperature Ratings for Steel Valves with BWE and SWE Connections⁽¹⁾

Valve Type	Valve Size, NPS	Pressure Rating	Intermediate Rating (ASME B16.34)
Globe Valves	1	CL900 and 1500	1675
		CL2500	2800
	2	CL900 and 1500	1694
	3	CL1500	1578
	4	CL1500	2017
	6	CL1500	1876

1. Contact your Emerson Process Management sales office for further information on intermediate ratings.

Table 4. Shutoff Classifications per ANSI/FCI 70-2 and IEC 60534-4

Valve Design		Port Diameter, mm (Inches)		ANSI/FCI and IEC Leakage Class	
HPD		47.6 (1.875)		II	
		58.7 (2.3125) to 92.1 (3.625)		II - Standard	
				III - Optional	
		111.1 (4.375) and larger		III - Standard	
IV - Optional					
HPD w/ C-seal trim	Valve Size, NPS	Port Diameter, mm (Inches)	Cage Style	ANSI/FCI and IEC Leakage Class	
	3	73 (2.875)	Eq. %, Mod. Eq. %, Linear (std. cage), Linear (Whisper III, A1, B1)	V - Standard to 593°C (1100°F) (for port diameters from 73 mm [2.875 inch] through 136.5 mm [5.375 inch] with optional C-seal trim) IV - Optional (for port diameters 73 mm [2.875 inch] through 136.5 mm [5.375 inch])	
	4	73 (2.875)	Linear (Whisper III, D3)		
			Linear (Cav III, 3-stage)		
		87.3 (3.4375)	Linear (Cav III, 2-stage)		
		92.1 (3.625)	Eq. %, Mod. Eq. %, Linear (std. cage), Linear (Whisper III, A1, B3, C3)		
	6	111.1 (4.375)	Linear (Whisper III, D3), Linear (Cav III, 3-stage)		
		136.5 (5.375)	Eq. %, Mod. Eq. %, Linear (std. cage), Linear (Whisper III, A1, B3, C3), Linear (Cav III, 2-stage)		
HPS, HPAS, HPT, HPAT		All	Cavitrol III and Micro-Flat		
			Micro-Form, Micro-Flute, Eq. %, Mod Eq. %, Linear, Whisper III	IV - Standard V - Optional	
HPS and HPT w/ TSO (Tight Shutoff trim)		See table 5	See table 5	TSO - Optional TSO is not an ANSI/FCI or IEC leakage class. Valves with TSO trim are factory tested to a more stringent Fisher test requirement of no leakage at time of shipment. Test medium is water. Specify service ΔP when ordering. Test procedure is ANSI/FCI Class V test procedure B	
HPT and HPAT w/ PEEK ⁽¹⁾ Anti-Extrusion Rings		47.6 (1.875) to 136.5 (5.375)	All	V - Standard (to 316°C [600°F]) IV - Optional (47.6 mm [1.875 inch] through 136.5 mm [5.375 inch] ports)	
1. PEEK (PolyEtherEtherKetone), required for all boiler feedwater applications.					

Material Selection Guidelines

Use the following steps as a guideline for the selection of materials:


1. Determine the pressure/temperature rating of the valve body size and material required. Inlet pressure and temperature must always be limited by the applicable ASME pressure/temperature rating.
2. Select the desired trim style from the Available Configurations specification and from table 4, Shutoff Classifications.
3. Select desired materials from tables 7, 8, 11, and 12 and figure 12. The temperature capabilities determined from figure 12 may be further limited by the temperature capabilities of materials selected from tables 7 and 12. Refer to figure 12 to determine pressure drop limits of the valve body-trim combinations selected.
4. Select the appropriate spiral-wound gasket material. N06600 is recommended for service up to 427°C (800°F). N07750 is recommended for service over 427°C (800°F) when improved corrosion resistance is required or when the valve is subject to severe temperature cycling service.

Installation

The valve must be installed so flow through the valve is as indicated by the flow direction arrow on the valve body. Consideration should be given to installing an upstream strainer, especially if the valve uses a Cavitrol III cage, Whisper Trim III, or WhisperFlo trim.

Overall dimensions are shown in figures 13, 14, and 15. Face-to-face dimensions are in compliance with ANSI/ISA-75.08.06. Actual end connection dimensions conform to ASME B16.25 for buttwelding ends and to ASME B16.5 for flanged ends.

Figure 3. Typical Balanced TSO Trim

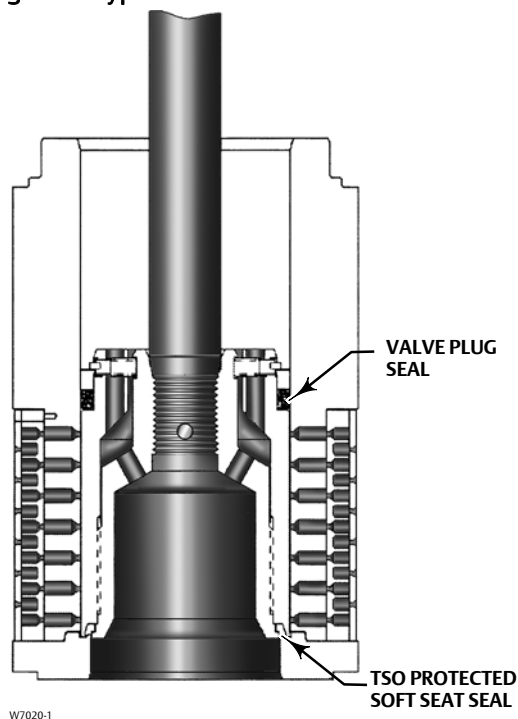


W7020-1

Table 5. Port Diameters, Valve Plug Travel, Yoke Boss Diameters for TSO (Tight Shutoff) Trim


VALVE TYPE	TRIM	MAX TRAVEL		YOKE BOSS SIZE		PORT DIAMETER				C _V REDUCTION AT 100% TRAVEL ⁽¹⁾	UNBALANCE AREA
		mm	Inch	mm	Inch	Nominal		Actual TSO			Inch ²
						mm	Inch	mm	Inch		
Balanced Plugs—Flow Down Only											
HPT NPS 3 ⁽²⁾	CAV III 3-Stage	63.5	2.5	90	3-9/16	47.6	1.875	42.9	1.6875	5%	0.031
HPT NPS 4	CAV III 3-Stage	76.2	3	90 127	3-9/16 5	73.0	2.875	68.3	2.6875	2%	0.047
HPT NPS 6	CAV III 3-Stage	102	4	90 127	3-9/16 5	116	4.5625	111	4.375	0%	0.080
	Standard	76.2	3	90 127	3-9/16 5	137	5.375	132	5.1875	4%	0.206
Unbalanced Plugs—Flow Down Only											
HPS NPS 2	CAV III 3-Stage	50.8	2	90	3-9/16	25.4	1	26.2	0.8125	0%	0.785
1. This column lists the percent reduction of published maximum C _V of the trim listed in the TRIM column. 2. Not available with 5-inch yoke boss.											

Figure 4. ENVIRO-SEAL and HIGH-SEAL Packing Systems

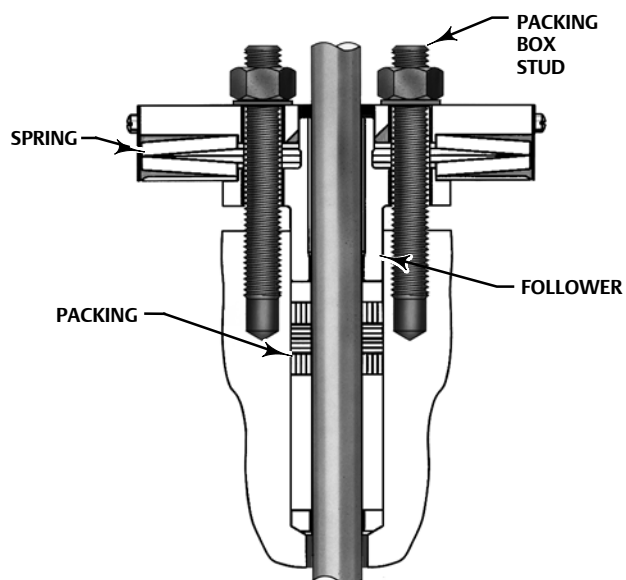


W8533-1

TYPICAL HIGH-SEAL PACKING SYSTEM
WITH GRAPHITE ULF PACKING

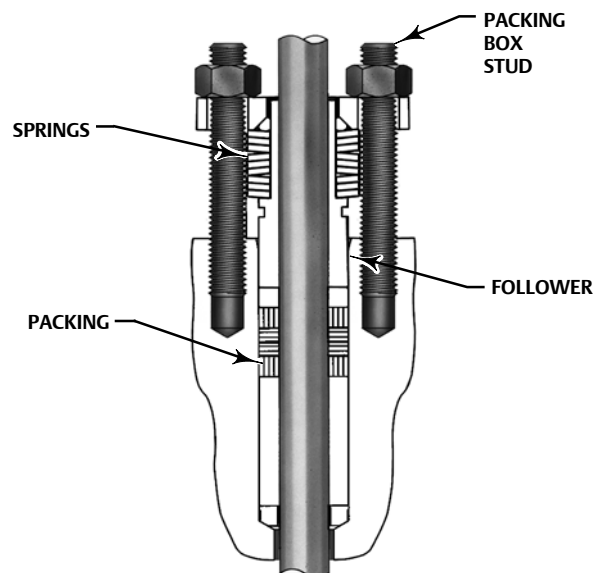

W8532-1

TYPICAL ENVIRO-SEAL PACKING SYSTEM
WITH GRAPHITE ULF PACKING

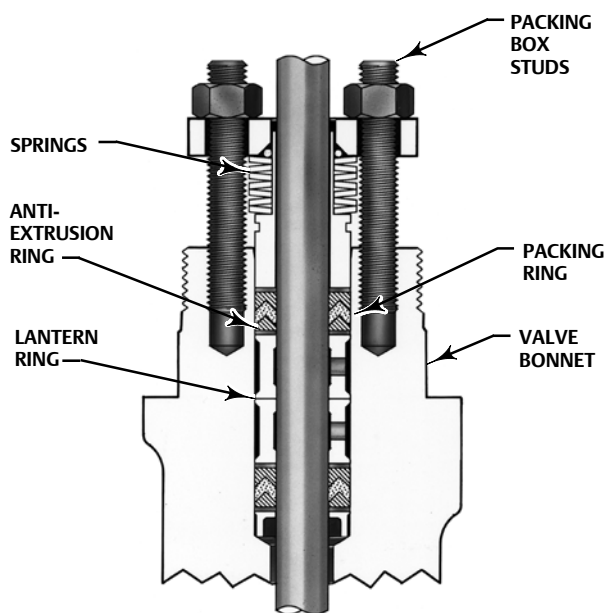

W5803-3


TYPICAL ENVIRO-SEAL PACKING SYSTEM
WITH PTFE PACKING

Table 6. Approximate Weights (Valve and Bonnet Assemblies)

VALVE TYPE	VALVE SIZE, NPS	PRESSURE RATING	KILOGRAMS		POUNDS	
			Flg	SWE, BWE	Flg	SWE, BWE
Globe Valves	1	CL900 and 1500	42	38	93	85
		CL2500	45	34	100	76
	1-1/2 x 2	CL2500	---	34	---	76
	2	CL900 and 1500	72	52	158	115
		CL2500	104	74	229	164
	3	CL900	125	---	276	---
		CL1500	129	97	284	213
	4	CL900	230	---	507	---
		CL1500	249	201	548	444
	6	CL900	511	---	1127	---
		CL1500	557	455	1228	1003
Angle Valves	1	CL900 and 1500	40	36	88	80
		CL2500	---	72 ⁽¹⁾	---	160 ⁽¹⁾
	2	CL900 and 1500	69	50	153	110
		CL2500	---	109 ⁽¹⁾	---	240 ⁽¹⁾

1. Only SWE is available for CL2500.

Figure 5. C-seal Trim

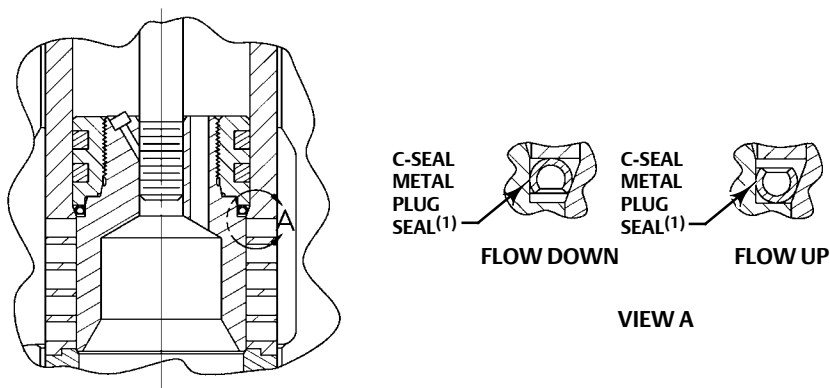

3781399-A

NOTES

1. REVERSE THE ORIENTATION OF THE C-SEAL PLUG SEAL FOR PROPER SHUTOFF WHEN VALVE IS USED IN A PROCESS WITH DIFFERENT FLUID FLOW DIRECTION.

Table 7. Construction Materials and Temperature Capabilities for Parts Other than Valve Body and Trim

PART		MATERIAL	TEMPERATURE CAPABILITIES	
			°C	°F
Valve plug stem		S20910	-198 to 593	-325 to 1100
HPD piston ring		Graphite (FMS 17F27)	-254 to 427 (to 482 for nonoxidizing service)	-425 to 800 (to 900 for nonoxidizing service)
		Graphite (FMS 17F39)	-254 to 537 (to 593 for nonoxidizing service)	-425 to 1000 (to 1100 for nonoxidizing service)
Spring-loaded HPT or HPAT valve plug seal	Backup ring	S41600 (416 SST)	-29 to 427	-20 to 800
		S31600 (316 SST)	-198 to 593	-325 to 1100
	Retaining ring	S30200 (302 SST) N07750 (NACE)	-254 to 593	-425 to 1100
	Seal ring	PTFE with N10276 Spring	-73 to 232 ⁽⁵⁾	-100 to 450 ⁽⁵⁾
	Anti-extrusion rings	PEEK (PolyEtherEtherKetone)	-73 to 316	-100 to 600
Cage gasket		N06600/Graphite	-240 to 593	-400 to 1100
TSO protected soft seat seal		Carbon-filled PTFE	-73 to 232	-100 to 450
Seat ring gasket		N06600/Graphite	-240 to 593	-400 to 1100
Valve Body-to-bonnet bolting ⁽¹⁾	Studs Nuts	Steel SA193-B7 (all valve body materials) Steel SA194-2H (all valve body materials)	-29 to 427 (WCC and WC9) -46 to 371 (LCC) -48 to 427 (316 CF8M) ⁽²⁾	-20 to 800 (WCC and WC9) -50 to 700 (LCC) -55 to 800 (316 CF8M) ⁽²⁾
	Studs Nuts	Steel SA193-B7M for sour service Steel SA194-2HM for sour service	-29 to 427 (WCC) -46 to 371 (LCC)	-20 to 800 (WCC) -50 to 700 (LCC)
	Studs Nuts	Steel SA193-B16 (WC9 and C12A valve body mat'ls) Steel SA194-7	-29 to 510	-20 to 950
	Studs Nuts	N07718 SST (SB637) ⁽³⁾ Steel SA194-7	-29 to 566 (WC9) -29 to 593 (C12A)	-20 to 1050 (WC9) -20 to 1100 (C12A)
	Studs Nuts	S31600 stainless steel SA193-B8M (strain hardened) (CF8M valve body mat'ls) ⁽⁴⁾ S31600 stainless steel SA194-8M (CF8M valve body mat'ls) ⁽⁴⁾	-198 to 427	-325 to 800
	Studs Nuts	S20910 SST (SA479-XM-19) ⁽³⁾ (CF8M valve body mat'ls) Steel SA194-7	-198 to 593	-325 to 1100
Packing		PTFE V-ring	-46 to 232	-50 to 450
		Graphite ribbon filament (oxidizing service to 371 °C [700 °F])	-254 to 537	-425 to 1000
		Graphite ribbon (high-temperature oxidizing service)	371 to 593	700 to 1100
Packing follower, spring, or lantern ring		S31600 stainless steel	-254 to 593	-425 to 1100
Packing box ring		S31600 stainless steel	-254 to 593	-425 to 1100
Packing flange, studs, or nuts		Steel	-29 to 427	-20 to 800
		S31600 stainless steel	-198 to 593	-325 to 1100

1. Valve body materials with which these bolting materials may be used are shown in parentheses.
2. Steel studs and nuts with NCF (non-corroding finish) coating are used with NPS 4 and 6 CF8M valve bodies.
3. These stud materials are not listed in ASME B16.34.
4. For valve sizes up through NPS 3.
5. If used with PEEK anti-extrusion rings, PTFE/carbon seal ring may be used in temperatures up to 316 °C (600 °F) for non-oxidizing service or up to 260 °C (500 °F) for oxidizing service.

Table 8. Additional Globe Valve Specifications

VALVE SIZE, NPS	FLOW CHARACTERISTIC	VALVE BODY DESIGN AND PLUG STYLE	PORT DIAMETER		VALVE PLUG TRAVEL		VALVE STEM DIAMETER	
			mm	Inches	mm	Inches	mm	Inches
1	Equal percentage	HPS w/Micro-Flute	6.4 12.7	0.25 0.5	19 19	0.75 0.75	12.7 12.7	1/2 1/2
		HPS w/Micro-Form	6.4 9.5 12.7 19.1	0.25 0.375 0.5 0.75	19 19 19 19	0.75 0.75 0.75 0.75	12.7 12.7 12.7 12.7, 19.1	1/2 1/2 1/2 1/2, 3/4
			19.1 25.4	0.75 1	29 29	1.125 1.125	12.7, 19.1 12.7, 19.1	1/2, 3/4 1/2, 3/4
	Linear (cage style: Cavitrol III, 2-stage)	HPS	22.2	0.875	38	1.5	12.7, 19.1	1/2, 3/4
2	Equal percentage	HPS w/Micro-Form	6.4 12.7 19.1	0.25 0.5 0.75	19 19 19	0.75 0.75 0.75	12.7 12.7 12.7, 19.1	1/2 1/2 1/2, 3/4
		HPS	47.6	1.875	29	1.125	12.7, 19.1, 25.4 ⁽¹⁾	1/2, 3/4, 1 ⁽¹⁾
	Linear (cage style: Std)	HPS, HPD, HPT						
	Linear (cage style: Whisper Trim III, level A1)		47.6	1.875	38	1.5	12.7, 19.1, 25.4 ⁽¹⁾	1/2, 3/4, 1 ⁽¹⁾
	Modified equal percentage	HPS w/Micro-Form	25.4 31.8 38.1	1 1.25 1.5	29 29 38	1.125 1.125 1.5	12.7, 19.1, 25.4 12.7, 19.1, 25.4 12.7, 19.1, 25.4	1/2, 3/4, 1 1/2, 3/4, 1 1/2, 3/4, 1
		HPS, HPD, HPT	47.6	1.875	38	1.5	12.7, 19.1, 25.4 ⁽¹⁾	1/2, 3/4, 1 ⁽¹⁾
	Linear (cage style: Cavitrol III, 2-stage)	HPT	44.5	1.75	51	2	12.7, 19.1	1/2, 3/4
3	Linear (cage style: Cavitrol III, 3-stage)	HPS	25.4	1	51	2	19.1	3/4
	Modified equal percentage	HPD, HPT						
	Linear (cage style: Std)							
	Linear (cage style: Whisper Trim III, level A1, B1)		73	2.875	51	2	12.7, 19.1, 25.4	1/2, 3/4, 1
	Linear (cage style: Cavitrol III, 2-stage)	HPT	63.5	2.5	64	2.5	12.7, 19.1, 25.4	1/2, 3/4, 1
4	Linear (cage style: Cavitrol III, 3-stage)	HPT	47.6	1.875	64	2.5	12.7, 19.1, 25.4	1/2, 3/4, 1
	Modified equal percentage	HPD, HPT						
	Linear (cage style: Std)							
	Linear (cage style: Whisper Trim III level A1, A3, B3, C3)		92.1	3.625	51	2	19.1, 25.4	3/4, 1
	Linear (cage style: Whisper Trim III level D3)	HPD, HPT	73	2.875	51	2	19.1, 25.4	3/4, 1
	Linear (cage style: Cavitrol III, 2-stage)	HPT	87.3	3.4375	76	3	19.1, 25.4	3/4, 1
4	Linear (cage style: Cavitrol III, 3-stage)	HPT	73	2.875	76	3	19.1, 25.4	3/4, 1

-continued-

Table 8. Additional Globe Valve Specifications (Continued)

VALVE SIZE, NPS	FLOW CHARACTERISTIC	VALVE BODY DESIGN AND PLUG STYLE	PORT DIAMETER		VALVE PLUG TRAVEL		VALVE STEM DIAMETER	
			mm	Inches	mm	Inches	mm	Inches
6	Modified equal percentage ⁽²⁾	HPD, HPT	136.5	5.375	76	3	19.1, 25.4, 31.8	3/4, 1, 1-1/4
	Linear (cage style: Std)							
	Linear (cage style: Whisper Trim III, level A1, B3, C3)	HPD, HPT	136.5	5.375	76	3	25.4, 31.8	1, 1-1/4
	Linear (cage style: Whisper Trim III, level D3)	HPD, HPT	111.1	4.375	76	3	25.4, 31.8	1, 1-1/4
	Linear (cage style: Cavitrol III, 2-stage)	HPD, HPT	133.4	5.25	102	4	19.1, 25.4, 31.8	3/4, 1, 1-1/4
	Linear (cage style: Cavitrol III, 3-stage)	HPD, HPT	115.9	4.5625	102	4	19.1, 15.4, 31.8	3/4, 1, 1-1/4
1. Available only with HPS valve. 2. The first 75% is equal percentage.								

Table 9. Valve Stem Travels for CL2500 Globe Valves

VALVE SIZE, NPS	VALVE DESIGN / PLUG STYLE	CHARACTERISTIC	PORT DIAMETER		MAXIMUM VALVE STEM TRAVEL	
			mm	Inches	mm	Inches
1	HPS / Micro-Form or Micro-Flute	Equal Percentage	6.4, 9.5, 12.7, 19.1, 25.4	0.25, 0.375, 0.5, 0.75, 1	19.1	0.75
		Modified Equal Percentage	6.4, 9.5, 12.7, 19.1, 25.4	0.25, 0.375, 0.5, 0.75, 1	25.4	1
2	HPS / Micro-Form	Equal Percentage	6.4, 19.1, 25.4, 31.8	0.25, 0.75, 1, 1.25	19.1	0.75
		Modified Equal Percentage	6.4, 19.1, 25.4, 31.8	0.25, 0.75, 1, 1.25	28.6	1.125
	HPS / Micro-Form	Equal Percentage	38.1	1.5	28.6	1.125
		Modified Equal Percentage	38.1	1.5	38.1	1.5
	HPS	Linear	47.6	1.875	25.4	1
		Equal Percentage				
		Modified Equal Percentage			28.6	1.125
	HPD, HPT	Linear	47.6	1.875	25.4	1
		Equal Percentage				
		Modified Equal Percentage			28.6	1.125

Table 10. Globe and Angle Valve Yoke Boss and Valve Stem Diameter Combinations⁽¹⁾

VALVE SIZE, NPS	STANDARD DIAMETERS				OPTIONAL DIAMETERS			
	mm		Inches		mm		Inches	
	Stem	Yoke Boss	Stem	Yoke Boss	Stem	Yoke Boss	Stem	Yoke Boss
1	12.7	71	0.5	2-13/16	19.1	90	0.75	3-9/16
2	12.7	71	0.5	2-13/16	25.4	127	1	5
	19.1	90	0.75	3-9/16				
3	19.1	90	0.75	3-9/16	12.7	71	0.5	2-13/16
					25.4	127	1	5
4	19.1	90	0.75	3-9/16	25.4	127	1	5
6	25.4	127	1	5	19.1	71	0.75	3-9/16
	31.8	127	1.25	5				
1. See tables 8, 9, and 11 for valve stem diameters available for specific constructions.								

Table 11. Additional Angle Valve Specifications

VALVE SIZE, NPS	FLOW CHARACTERISTIC	VALVE BODY DESIGN AND PLUG STYLE	FLOW DIRECTION	PORT DIAMETER		VALVE PLUG TRAVEL		VALVE STEM DIAMETER	
				mm	Inches	mm	Inches	mm	Inches
1	Equal percentage	HPAS w/Micro-Flute	Up ⁽²⁾	6.4	0.25	19	0.75	12.7	1/2
				9.5	0.375	19	0.75	12.7	1/2
				12.7	0.5	19	0.75	12.7	1/2
		HPAS w/Micro-Form	Up	6.4	0.25	19	0.75	12.7	1/2
				12.7	0.5	19	0.75	12.7	1/2
				19.1	0.75	19	0.75	12.7, 19.1	1/2, 3/4
		HPAS, equal percentage characterized cage	Down	19.1	0.75	19	0.75	19.1	3/4
	Modified equal percentage	HPAS w/Micro-Form	Up	12.7	0.5	29	1.125	12.7	1/2
				19.1	0.75	29	1.125	12.7, 19.1	1/2, 3/4
		HPAS	Down	25.4	1	29	1.125	12.7, 19.1	1/2, 3/4
2	Equal percentage	HPAS w/Micro-Flute	Up ⁽²⁾	6.4	0.25	19	0.75	12.7	1/2
				9.5	0.375	19	0.75	12.7	1/2
				12.7	0.5	19	0.75	12.7	1/2
		HPAS w/Micro-Form	Up	6.4	0.25	19	0.75	12.7	1/2
				12.7	0.5	19	0.75	12.7	1/2
				19.1	0.75	19	0.75	12.7, 19.1	1/2, 3/4
				25.4	1	19	0.75	12.7, 19.1, 25.4	1/2, 3/4, 1
		HPAS, equal percentage characterized cage	Down	19.1	0.75	19	0.75	19.1	3/4
				25.4	1	19	0.75	19.1	3/4
				31.8	1.25	19	0.75	25.4	1
				38.1	1.5	29	1.125	25.4	1
		HPAS	Up	47.6	1.875	29	1.125	12.7, 19.1, 25.4	1/2, 3/4, 1
		HPAT	Down	47.6	1.875	29	1.125	12.7, 19.1	1/2, 3/4
	Modified equal percentage	HPAS w/Micro-Form	Up	25.4	1	29	1.125	12.7, 19.1, 25.4	1/2, 3/4, 1
				31.8	1.25	29	1.125	12.7, 19.1, 25.4	1/2, 3/4, 1
				38.1	1.5	38	1.5	12.7, 19.1, 25.4	1/2, 3/4, 1
		HPAS, equal percentage characterized cage	Down	19.1	0.75	29	1.125	19.1	3/4
				25.4	1	29	1.125	19.1	3/4
				31.8	1.25	29	1.125	25.4	1
				38.1	1.5	38	1.5	25.4	1
		HPAS	Up	47.6	1.875	38	1.5	12.7, 19.1, 25.4	1/2, 3/4, 1
		HPAT	Down	47.6	1.875	38	1.5	12.7, 19.1	1/2, 3/4
		Linear (cage style: std)	Down	25.4	1	29	1.125	19.1	3/4
	Linear (cage style: std)	HPAS	Up	47.6	1.875	38	1.5	12.7, 19.1, 25.4	1/2, 3/4, 1
			Down	47.6	1.875	38	1.5	12.7, 19.1	1/2, 3/4
		HPAS, HPAT	Up	47.6	1.875	38	1.5	12.7, 19.1, 25.4 ⁽¹⁾	1/2, 3/4, 1 ⁽¹⁾
			Down	44.5	1.75	51	2	12.7, 19.1	1/2, 3/4
		Linear (cage style: Cavitrol III, 2-stage)	Down	25.4	1	51	2	19.1	3/4
		Linear (cage style: Cavitrol III, 3-stage)	Down	25.4	1	51	2	19.1	3/4

1. Available only with HPAS valves.

2. Micro-Flutes (1 flute and 0.5 inch port 2 flute) may be used flow down in flashing and erosive service.

Figure 6. Fisher HPS Trim with Micro-Flute Valve Plug


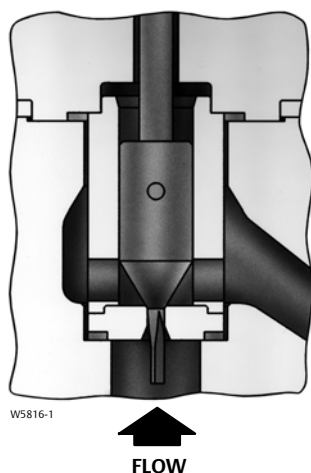


Figure 7. Fisher HPS Trim with Micro-Form Valve Plug

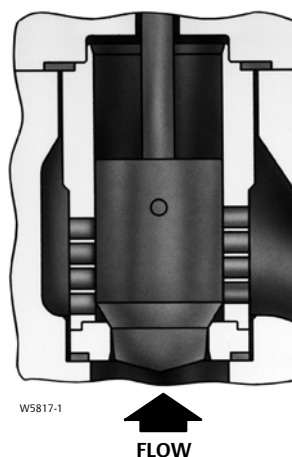

Trim Selection Guidelines

Refer to the following descriptions as a guideline for the selection of appropriate trims. Trims 204, 202, and 203 should not be used in boiler feedwater due to amine corrosion problems associated with CoCr-A and R30006 (alloy 6).

- **Trim 201**—Trim 201 is the standard trim for carbon steel and alloy steel valve bodies. Trim 201A, with an S41600 (416 stainless steel) heat-treated seat ring, is recommended for general and severe service applications up to 427°C (800°F) for the NPS 1 and 2 valve size and up to 343°C (650°F) for the NPS 3 through 6 valve size. Typical applications for Trim 201 include services in boiler feedwater (Trim 201A only), water, non-sour hydrocarbons, and steam. The S41600 heat-treated plug and seat ring have a minimum hardness of 38 HRC (Rockwell C), as compared to CoCr-A with a minimum hardness of 36 HRC.
- **Trim 204**—Trim 204 should be used for sour service or moderately corrosive service. Standard stem material, S20910 meets the metallurgical requirements of NACE MR0175-2002. Trim 204 should not be used in boiler feedwater service if amine problems exist.
- **Trim 202**—Trim 202 is designed primarily for use in all high temperature applications between 427°C (800°F) and 566°C (1050°F), but can also be used between -29°C (-20°F) and 427°C (800°F). Not for boiler feedwater use if amine problems exist. Trim 202 is recommended for use in NPS 6 valves between -29°C (-20°F) and 343°C (650°F). Trim 202H is recommended for use in NPS 6 valves between 260°C (500°F) and 566°C (1050°F).
- **Trim 203**—Trim 203 is the standard trim for stainless steel valve body materials and should only be used with stainless steel valve body materials. Not for boiler feedwater use if amine problems exist.
- **Trim 211**—Trim 211 is the standard trim for C12A valve body materials and should only be used with C12A valve body materials. C12A should only be used when the pressure and temperature capabilities for WC9 valve body materials are not acceptable.

Figure 8. NPS 2 Fisher HPS Trim with Cavitrol III 3-Stage Cage

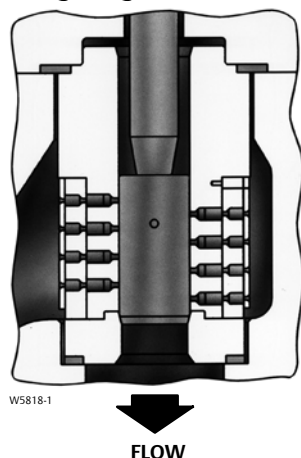


Figure 10. Fisher HPD Trim with Whisper Trim III Level D Cage (also available in HPT and HPS)

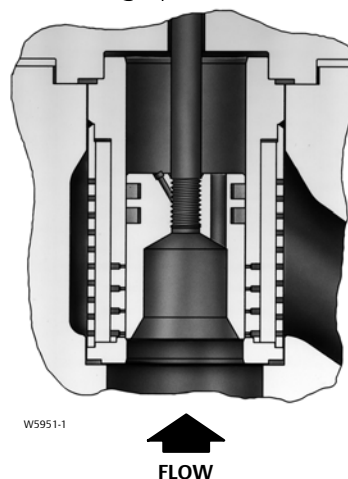


Figure 9. Fisher HPT Trim with Whisper Trim III Level A1 Cage (also available in HPD [NPS 2-6] and HPS [NPS 2 and 3])


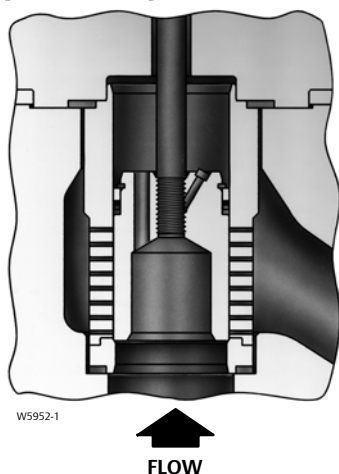


Figure 11. Fisher HPAS Trim with Micro-Flat Valve Plug

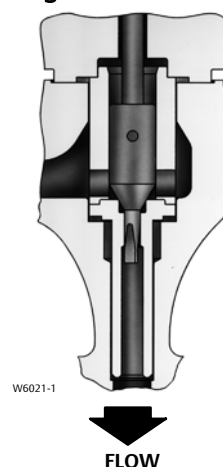

C-seal Trim Description

C-seal trim is available for HPD valves with port diameters from 2.875 inches through 5.375 inches.

With C-seal trim, a balanced valve can achieve high-temperature, Class V shutoff. Because the C-seal plug seal is formed from metal (N07718 nickel alloy) rather than an elastomer, a valve equipped with the C-seal trim can be applied in processes with a fluid temperature of up to 593°C (1100°F).

Fisher TSO (Tight Shutoff) Trim Capabilities

TSO trim is available for HPS and HPT valves with port diameters as defined in table 5. Also see figure 3 and table 4.

TSO trim consists of a protected soft seat plus PEEK anti-extrusion rings with a spring-loaded PTFE plug seal. Used only in flow down applications, TSO trim offers unparalleled shutoff integrity, resulting in longer plug and seat life. For additional information contact your Emerson Process Management sales office.

Table 12. Trim Material Combinations

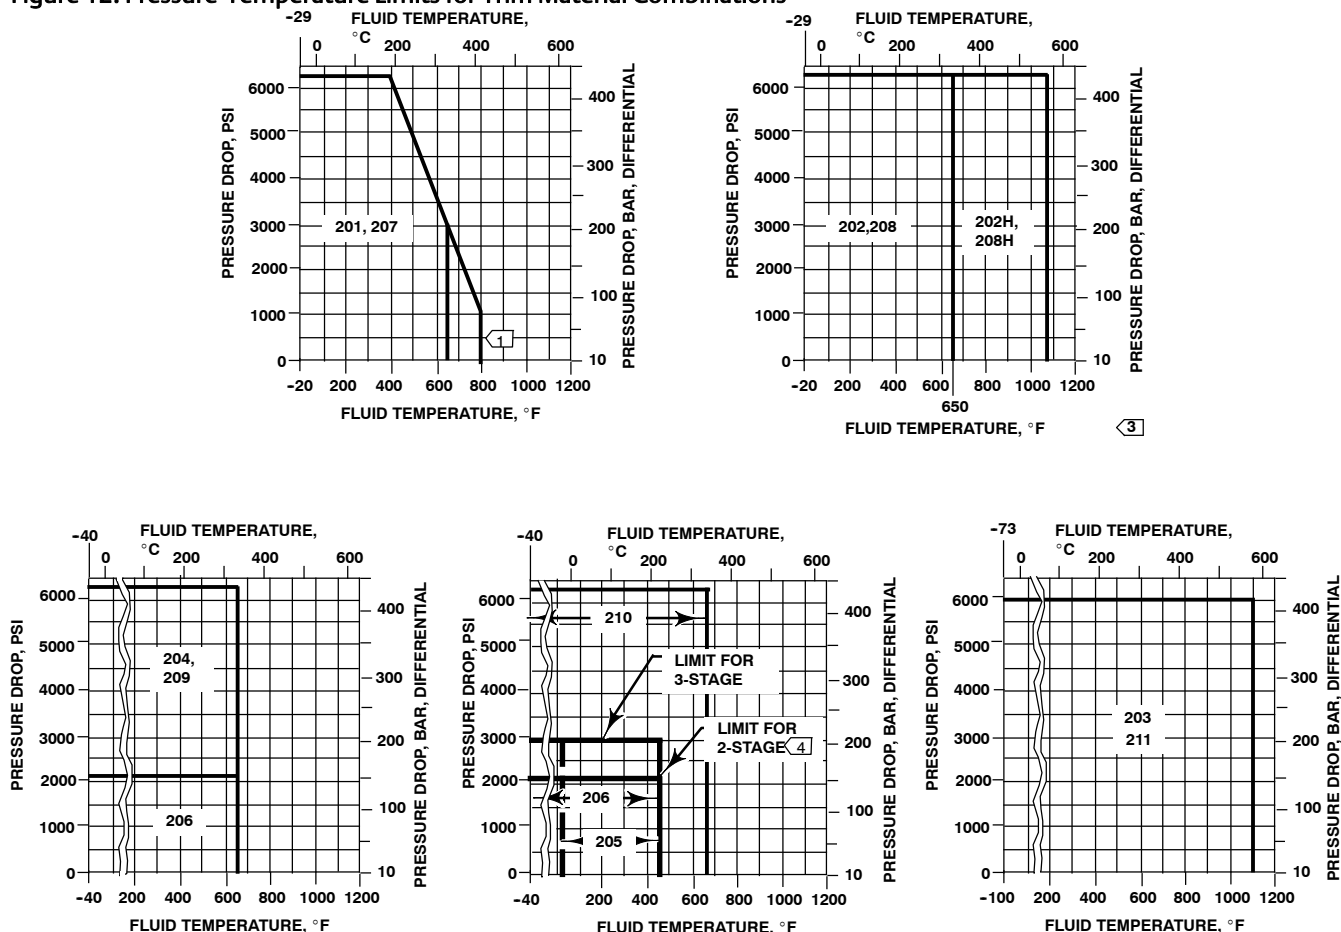
TRIM	USAGE	VALVE PLUG	CAGE	SEAT RING	VALVE BODY MATERIAL ⁽¹⁾	OPERATING TEMPERATURE RANGE	
						°C	°F
With Standard Cage							
201A	HP (NPS 1-6 CL900 & 1500 & NPS 1-2 CL2500) HPA (NPS 1-2 CL900, 1500, 2500)	S41600 heat-treated for HP, Micro-Form (HPA), and flow down HPAS)	S17400 (17-4 SST) H1075 heat-treated	S41600 heat-treated	WCC, LCC, WC9	-29 to 343 (NPS 3, 4, and 6) -29 to 427 (NPS 1 and 2)	-20 to 650 (NPS 3, 4, and 6) -20 to 800 (NPS 1 and 2)
		S44004 (440C SST) heat-treated for Micro-Flute and Micro-Flat (HPA only) valve plugs		HPA (S44004 heat-treated seat ring for Micro-Flat S44004 heat-treated seat and liner)			
202	HPD & HPS only (NPS 1-6 CL900 & 1500 & NPS 1 to 2 CL2500) HPAS (NPS 1-2 CL900, 1500, 2500)	S31600 (316 stainless steel) with CoCr-A seat and guide	F22 Cr-Mo alloy steel nitrided	S31600/CoCr-A R30006 (Alloy 6) for Micro-Flat valve plugs R30006 seat, liner ⁽⁶⁾	WCC, LCC, WC9	-29 to 566	-20 to 1050
202H ⁽⁵⁾	HPD NPS 6 CL900 & 1500 only	S31600 (316 stainless steel) with CoCr-A seat and guide	F22 Cr-Mo alloy steel nitrided	S31600/CoCr-A	WCC, LCC, WC9	-29 to 566	-20 to 1050
203 (NACE) ^(1,2)	HP (NPS 1-6 CL900 & 1500 & NPS 1-2 CL2500) HPA (NPS 1-2 CL900, 1500, 2500)	S31600 with CoCr-A seat and guide	S31600/hard Cr coat	S31600/CoCr-A R30006 (Alloy 6) for Micro-Flat valve plugs R30006 seat, liner ⁽⁶⁾	CF8M	-73 to 593	-100 to 1100
204 (NACE) ^(1,2)		S31600 with CoCr-A seat and guide	S17400 Double H1150 heat-treated	S31600/CoCr-A R30006 (Alloy 6) for Micro-Flat valve plugs R30006 seat, liner ⁽⁶⁾	WCC, LCC, WC9	-46 to 343	-50 to 650
210		S31600 with CoCr-A seat and guide	S17400 H1075	S31600/CoCr-A	WCC, LCC, WC9	-29 to 343	-20 to 650
211	HPD & HPS only (NPS 1-6 CL900 & 1500 & NPS 1 to 2 CL2500) HPAS (NPS 1-2 CL900, 1500, 2500)	F91 with CoCr-A seat and guide	F91 ion nitrided	F91 with CoCr-A	C12A	-29 to 593	-20 to 1100
With Cavitrol III Cage							
205A	HP (NPS 1-6 CL900 & 1500 & NPS 1-2 CL2500) HPA (NPS 1-2 CL900, 1500, 2500)	S44004 heat-treated/ S20910 stem	S17400 H1075 heat-treated	S44004	WCC, LCC, WC9	-29 to 232 ⁽³⁾	-20 to 450 ⁽³⁾
205B		S44004 heat-treated/ S31600 stem	S17400 H1075 heat-treated	S44004	WCC, LCC, WC9	-29 to 232 ⁽³⁾	-20 to 450 ⁽³⁾
206 (NACE) ^(1,2)		S31600 with CoCr-A seat and guide	S17400 Double H1150 heat-treated	S31600/CoCr-A	WCC, LCC, WC9	-46 to 232 ⁽³⁾	-50 to 450 ⁽³⁾
With Whisper Trim III Cage							
207A	HP (NPS 1-6 CL900 & 1500 & NPS 1-2 CL2500) HPA (NPS 1-2 CL900, 1500, 2500)	S41600 heat-treated	S17400 H1075 heat-treated	S41600 heat-treated	WCC, LCC, WC9	-29 to 343 ⁽⁴⁾	-20 to 650 ⁽⁴⁾
207B	HP (NPS 1-6 CL900 & 1500 & NPS 1-2 CL2500)	S41600 heat-treated	S17400 H1075 heat-treated	S31600/CoCr-A	WCC, LCC, WC9	343 to 427	650 to 800
208	HPD & HPS only (NPS 1-6 CL900 & 1500 & NPS 1 to 2 CL2500) HPAS (NPS 1-2 CL900, 1500, 2500)	S31600 with CoCr-A seat and guide	F22 steel nitrided	S31600/CoCr-A	WCC, LCC, WC9	-29 to 566	-20 to 1050
208H ⁽⁵⁾	HPD (NPS 6 CL900 & 1500 only)	S31600 with CoCr-A seat and guide	F22 steel nitrided	S31600/CoCr-A	WCC, LCC, WC9	-29 to 566	-20 to 1050
209 (NACE) ^(1,2)	HP (NPS 1-6 CL900 & 1500 & NPS 1-2 CL2500) HPA (NPS 1-2 CL900, 1500, 2500)	S31600 with CoCr-A seat and guide	S17400 Double H1150 heat-treated	S31600/CoCr-A	WCC, LCC, WC9	-46 to 343	-50 to 650
1. If using valve body/trim combinations other than those listed, consult your Emerson Process Management sales office. 2. NACE MR0175-2002. 3. NPS 1 2 stage and NPS 2 3 stage HPS can be used at temperatures up to 343°C (650°F). 4. NPS 1 and 2 can be used at temperatures up to 427°C (800°F). 5. Trims 202H and 208H have clearances for high-temperature service. 6. For HPA valves.							

Table 13. Flowing Pressure Drop Limits for NPS 6 HPD and HPT Valves (Without Cavitrol III or Whisper Trim III Cage)

FLOW MEDIA	STEM DIAMETER, mm (INCHES)	MAXIMUM FLOWING PRESSURE DROP			
		Bar		PSI	
		Flow Down	Flow Up	Flow Down	Flow Up
All except boiler feedwater	19 (3/4)	103	---	1500	---
	25.4 (1)	172	---	2500	---
	31.8 (1-1/4)	259	---	3750	---
	51.8 x 31.8 ⁽¹⁾ (2 x 1-1/4)	259	259	3750	3750
Boiler feedwater	31.8 (1-1/4)	69	---	1000	---
	51.8 x 31.8 ⁽¹⁾ (2 x 1-1/4)	138	259	2000	3750

1. Requires 31.8 mm (1-1/4 inch) S20910 stem with 52.8 mm (2-inch) plug-to-stem connection.

Figure 12. Pressure-Temperature Limits for Trim Material Combinations

SOUR SERVICE APPLICATIONS (NACE) 2

NOTES:

- 1 USE TRIM 207B IN NPS 3, 4, AND 6 HP ABOVE 343°C (650°F).
2 NACE MR0175-2002.
3 BE ESPECIALLY CAREFUL TO SPECIFY SERVICE TEMPERATURE IF TRIM 202 OR 208 IS SELECTED, AS DIFFERENT THERMAL EXPANSION RATES REQUIRE SPECIAL PLUG CLEARANCES.
4 THE LIMIT FOR 2-STAGE NPS 1 AND 2 VALVES IS 2160 PSIG. FOR NPS 3 TO 6 VALVES THE LIMIT IS 1800 PSIG.

C0746-5

Table 14. Globe Valve Dimensions with Standard Bonnet

VALVE SIZE, NPS	A ⁽¹⁾							
	ASME						EN	
	CL900		CL1500				PN160	PN250
	RF	RTJ	BWE	SWE	RF	RTJ		
mm								
1	292	292	292	292	292	292	269	277
2	375	378	375	375	375	378	344	360
3	442	445	460	---	460	464	442	460
4	511	514	530	---	530	533	511	530
6	714	718	768	---	768	775	714	768
	CL2500							
1	---	---	318	318	318	318	---	---
2	---	---	400	400	413	416	---	---
	CL900		CL1500				PN160	PN250
Inches								
1	11.50	11.50	11.50	11.50	11.50	11.50	10.58	10.90
2	14.75	14.88	14.75	14.75	14.75	14.88	13.56	14.18
3	17.38	17.50	18.12	---	18.12	18.25	17.38	18.12
4	20.12	20.25	20.88	---	20.88	21.00	20.12	20.88
6	28.12	28.25	30.25	---	30.25	30.50	28.12	30.25
	CL2500							
1	---	---	12.50	12.50	12.50	12.50	---	---
2	---	---	15.75	15.75	16.25	16.38	---	---
1. RF-raised-face flanges; RTJ-ring-type joint flanges; BWE-buttwelding ends; SWE-socketweld ends.								

1. RF-raised-face flanges; RTJ-ring-type joint flanges; BWE-buttwelding ends; SWE-socketweld ends.

Table 15. Globe Valve Dimensions with Standard Bonnet

VALVE SIZE, NPS	B ⁽¹⁾							
	ASME						EN	
	CL900		CL1500				PN160	PN250
	RF	RTJ	BWE	SWE	RF	RTJ		
mm								
1	146	146	146	146	146	146	134	138
2	187	189	187	187	187	189	172	180
3 ⁽²⁾	221	222	230	---	230	232	---	---
3 ⁽³⁾	200	202	210	---	210	211	192	202
4	229	230	238	---	238	240	218	232
6	310	311	337	---	337	340	298	316
	CL2500							
1	---	---	159	159	159	159	---	---
2	---	---	200	200	206	208	---	---
	CL900		CL1500				PN160	PN250
Inches								
1	5.75	5.75	5.75	5.75	5.75	5.75	5.29	5.45
2	7.38	7.44	7.38	7.38	7.38	7.44	6.78	7.09
3 ⁽²⁾	8.69	8.75	9.06	---	9.06	9.12	---	---
3 ⁽³⁾	7.88	7.94	8.25	---	8.25	8.31	7.54	7.94
4	9.00	9.06	9.38	---	9.38	9.44	10.75	9.13
6	12.19	12.25	13.25	---	13.25	13.38	11.72	12.43
	CL2500							
1	---	---	6.25	6.25	6.25	6.25	---	---
2	---	---	7.88	7.88	8.12	8.19	---	---
1. RF-raised-face flanges; RTJ-ring-type joint flanges; BWE-buttwelding ends; SWE-socketweld ends. 2. Manufactured in U.S.A. 3. Manufactured in Europe and Japan.								


1. RF-raised-face flanges; RTJ-ring-type joint flanges; BWE-buttwelding ends; SWE-socketweld ends.
2. Manufactured in U.S.A.
3. Manufactured in Europe and Japan.

Table 16. Globe Valve Dimensions with Standard Bonnet

STANDARD BONNETS				
VALVE SIZE, NPS	G	D		
		Yoke Boss Diameters, mm (Inches)		
		71 (2-13/16)	90 (3-9/16)	127 (5)
mm				
CL900 and 1500				
1	52	260	267	---
2 Std, Whisper III, Cavitrol III 3-Stage	77	261	267	331
2, Cavitrol III 2-Stage	77	279	286	344
3 ⁽¹⁾	121	322	311	370
3 ⁽²⁾	141	289	278	337
4	175	---	300	368
6	248	---	365	402
CL2500				
1	63	35	35	---
2 Std, Whisper III, Cavitrol III 3-Stage	84	303	303	352
2, Cavitrol III 2-Stage	84	320	320	40
Inches				
CL900 and 1500				
1	2.06	10.25	10.50	---
2 Std, Whisper III, Cavitrol III 3-Stage	3.06	10.31	10.56	13.06
2, Cavitrol III 2-Stage	3.06	11.00	11.25	13.56
3 ⁽¹⁾	4.75	12.69	12.25	14.56
3 ⁽²⁾	5.56	11.38	10.94	13.25
4	6.88	---	11.81	14.50
6	9.75	---	14.38	15.81
CL2500				
1	2.47	10.07	10.07	---
2 Std, Whisper III, Cavitrol III 3-Stage	3.31	11.91	11.91	13.85
2, Cavitrol III 2-Stage	3.31	12.59	12.59	14.53
EXTENSION BONNETS (CL900 AND 1500)				
VALVE SIZE, NPS	G	D		
		Yoke Boss Diameters, mm (Inches)		
		71 (2-13/16)	90 (3-9/16)	127 (5)
mm				
1	52	384	400	---
2 Std, Whisper III, Cavitrol III 3-Stage	77	430	446	505
Inches				
1	2.06	15.12	15.75	---
2 Std, Whisper III, Cavitrol III 3-Stage	3.06	16.94	17.56	19.88
2, Cavitrol III 2-Stage	3.06	17.62	18.25	20.38
2, Cavitrol III 2-Stage	77	448	464	518
1. Manufactured in U.S.A. 2. Manufactured in Europe and Japan.				


1. Manufactured in U.S.A.
2. Manufactured in Europe and Japan.

Figure 13. Globe Valve Dimensions with Standard Bonnet (also see tables 14, 15, and 16)

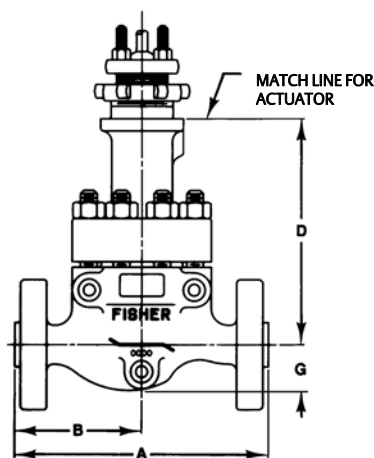


FLANGED VALVE WITH 71 OR 90 mm
(2-13/16 OR 3-9/16 INCH)
DIAMETER YOKE BOSS

A5700A-3

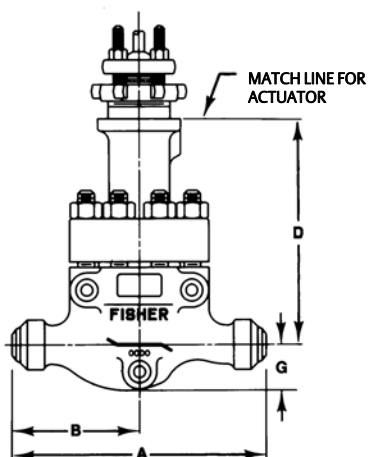


BUTTWELDING END VALVE WITH 71 OR 90 mm
(2-13/16 OR 3-9/16 INCH)
DIAMETER YOKE BOSS

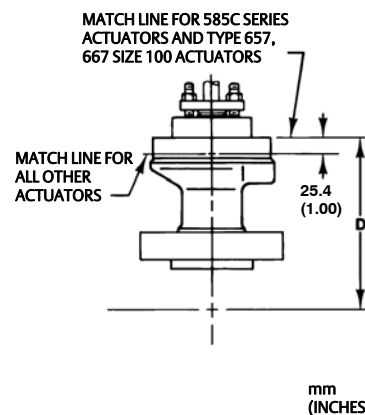

127mm (5-INCH) DIAMETER YOKE BOSS
FOR USE WITH ALL
VALVES


mm
(INCHES)

TYPICAL NPS 1, 2, AND 3

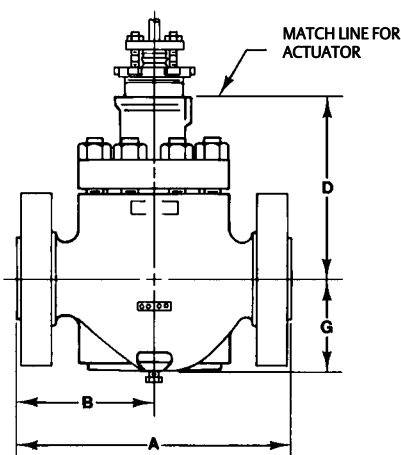


FLANGED VALVE WITH 71 OR 90 mm
(2-13/16 OR 3-9/16 INCH)
DIAMETER YOKE BOSS

A2719A-4

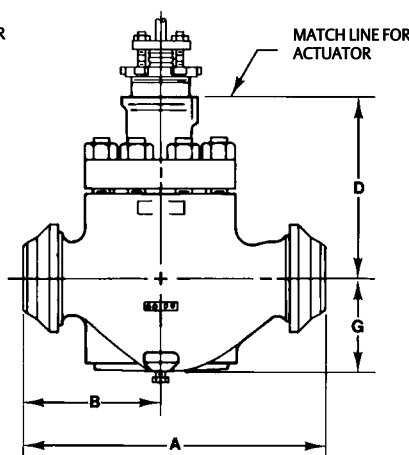

BUTTWELDING END VALVE WITH 71 OR 90 mm
(2-13/16 OR 3-9/16 INCH)
DIAMETER YOKE BOSS

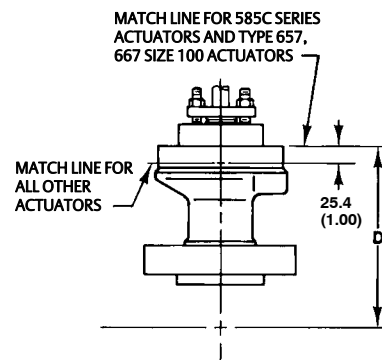

127mm (5-INCH) DIAMETER YOKE BOSS
FOR USE WITH FLANGED OR
BUTTWELDING VALVE

mm
(INCHES)


TYPICAL NPS 3 (EUROPE AND JAPAN MANUFACTURE), 4, AND 6

NOTE:
FOR DIMENSIONS OF VALVES WITH OTHER END CONNECTIONS, CONSULT YOUR EMERSON PROCESS MANAGEMENT SALES OFFICE.

Table 17. Dimensions D for Style 1 Extension Bonnet
(A, B, and G Dimensions Listed in Figure 13 Do Not Change When Extension Bonnet is Used)

VALVE SIZE, NPS	D		
	Yoke Boss Diameters, mm (Inches)		
	71 (2-13/16)	90 (3-9/16)	127 (5)
mm			
1 (std trim)	383	390	---
2 (std, Whisper III, Cavitrol III, 3-stage trim)	430	445	504
2 (Cavitrol III 2-stage trim)	447	463	517
Inches			
1 (std trim)	15.09	15.34	---
2 (std, Whisper III, Cavitrol III 3-stage trim)	16.91	17.53	19.84
2 (Cavitrol III 2-stage trim)	17.59	18.22	20.34

Figure 14. Dimensions D for Style 1 Extension Bonnet (A, B, and G Dimensions Listed in Figure 13 Do Not Change When Extension Bonnet is Used) (also see table 17)

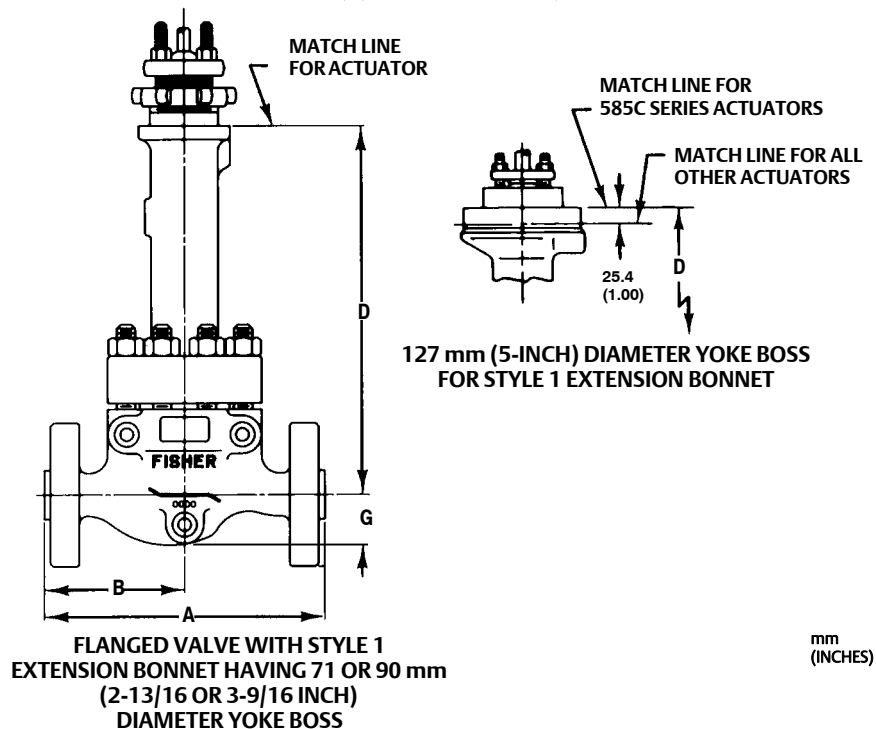

A5701A-2

Table 18. Angle Valve Dimensions with Standard Bonnet


STANDARD BONNETS						
VALVE SIZE, NPS	D					
	Yoke Boss Diameters, mm (Inches)					
	71 (2-13/16)		90 (3-9/16)		127 (5)	
	CL900 and 1500	CL2500	CL900 and 1500	CL2500	CL900 and 1500	CL2500
mm						
1	230	204	238	210	---	---
2 Std, Whisper III, Cavitrol III 3-Stage	227	240	233	229	297	288
2 Cavitrol III 2-Stage	244	257	251	246	314	305
Inches						
1	9.06	8.04	9.38	8.28	---	---
2 Std, Whisper III, Cavitrol III 3-Stage	8.94	9.45	9.19	9.00	11.69	11.32
2 Cavitrol III 2-Stage	9.62	10.13	9.88	9.69	12.38	12.01
EXTENSION BONNETS						
VALVE SIZE, NPS	D					
	Yoke Boss Diameters, mm (Inches)					
	71 (2-13/16)		90 (3-9/16)		127 (5)	
	CL900 and 1500	CL2500	CL900 and 1500	CL2500	CL900 and 1500	CL2500
mm						
1	354	373	371	388	---	---
2 Std, Whisper III, Cavitrol III 3-Stage	395	---	411	---	470	---
2 Cavitrol III 2-Stage	413	---	429	---	487	---
Inches						
1	13.94	14.67	14.62	15.28	---	---
2 Std, Whisper III, Cavitrol III 3-Stage	15.56	---	16.19	---	18.50	---
2 Cavitrol III 2-Stage	16.25	---	16.88	---	19.19	---

Table 19. Angle Valve Dimensions with Standard Bonnet

VALVE SIZE, NPS	G		A ⁽¹⁾					
	ASME						EN	
	CL2500		CL900 and 1500				PN160	PN250
	SWE	SWE	BWE	SWE	RF	RTJ		
mm								
1	141	102	141	141	141	141	130	134
2	184	124	178	178	178	179	163	170
Inches								
1	5.56	4.00	5.56	5.56	5.56	5.56	5.10	5.26
2	7.25	4.88	7.00	7.00	7.00	7.06	6.40	6.71
1. RF—raised-face flanges; RTJ—ring-type-joint flanges; BWE—butt-welding ends; SWE—socket-weld ends.								

1. RF—raised-face flanges; RTJ—ring-type-joint flanges; BWE—butt-welding ends; SWE—socket-weld ends.

Figure 15. Angle Valve Dimensions with Standard Bonnet (also see tables 18 and 19)

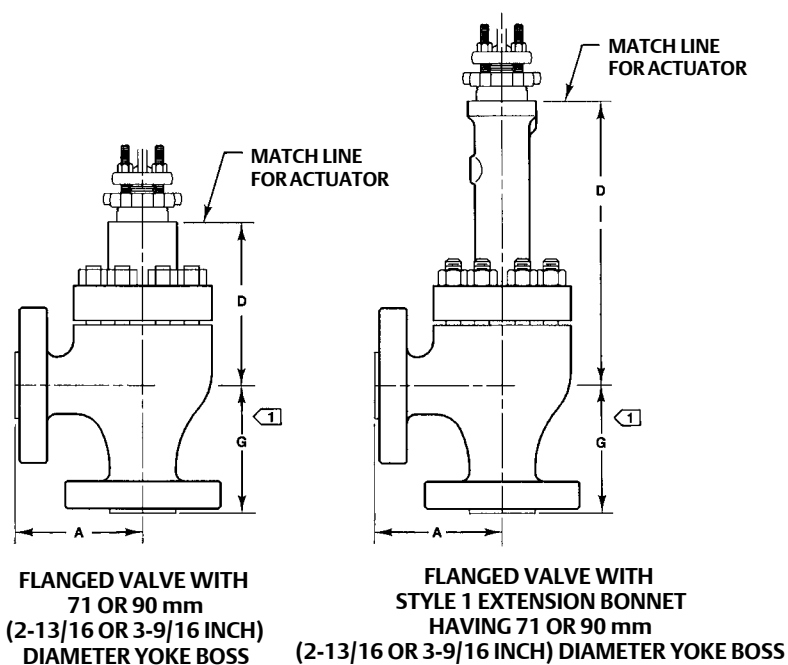

A6018A-1

- 1) FOR CL900 AND 1500 VALVES, $G = A$.
FOR CL2500 VALVES, SEE TABLE 19 FOR THE G DIMENSION.

NOTE:
FOR DIMENSIONS OF VALVES WITH OTHER END CONNECTIONS, CONSULT YOUR EMERSON PROCESS MANAGEMENT SALES OFFICE.

Coefficients

Table 20. Fisher HPAT, CL900, 1500, and 2500 (Linear and Equal Percentage Cages Without Liner, Flow Down through the Port)

HPAT, CL900 and 1500, Flow Down																Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	38	1.5	C _v	---	3.32	13.8	26.5	37.7	46.3	52.8	58.0	62.0	64.3	0.88
					K _v	---	2.87	11.9	22.9	32.6	40.0	45.7	50.2	53.6	55.6	---
					X _T	---	0.813	0.518	0.508	0.548	0.595	0.633	0.630	0.613	0.612	---
					F _d	0.89	0.62	0.44	0.30	0.24	0.22	0.19	0.17	0.16	0.15	---
HPAT, CL900 and 1500, Flow Down																Equal Percentage Characteristic
2	47.6	1.875	29	1.125	C _v	---	1.13	3.51	7.94	13.8	20.7	29.0	37.3	42.6	48.8	0.87
					K _v	---	0.977	3.04	6.87	11.9	17.9	25.1	32.3	36.8	42.2	---
					X _T	---	0.579	0.566	0.573	0.526	0.495	0.513	0.570	0.598	0.638	---
					F _d	1.00	0.76	0.50	0.40	0.31	0.28	0.24	0.22	0.20	0.19	---
HPAT, CL900 and 1500, Flow Down																Modified Equal Percentage Characteristic
2	47.6	1.875	38	1.5	C _v	---	2.45	7.82	16.5	26.2	35.8	45.1	52.8	57.1	61.1	0.90
					K _v	---	2.12	6.76	14.3	22.7	31.0	39.0	45.7	49.4	52.9	---
					X _T	---	0.572	0.533	0.522	0.531	0.555	0.610	0.656	0.657	0.586	---
					F _d	0.99	0.49	0.40	0.30	0.26	0.22	0.20	0.18	0.16	0.16	---
HPAT, CL2500, Flow Down																Linear Characteristic
2	47.6	1.875	38	1.5	C _v	---	3.32	13.8	24.2	32.1	37.6	41.5	44.2	46.0	47.4	0.88
					K _v	---	2.87	11.9	20.9	27.8	32.5	35.9	38.2	39.8	41.0	---
					X _T	---	0.813	0.518	0.672	0.716	0.766	0.816	0.851	0.862	0.832	---
					F _d	0.89	0.62	0.44	0.30	0.24	0.22	0.19	0.17	0.16	0.15	---
HPAT, CL2500, Flow Down																Equal Percentage Characteristic
2	47.6	1.875	29	1.125	C _v	---	1.13	3.51	7.94	13.8	20.7	26.4	31.7	35.5	38.2	0.87
					K _v	---	0.977	3.04	6.87	11.9	17.9	22.8	27.4	30.7	33.0	---
					X _T	---	0.579	0.566	0.573	0.526	0.495	0.589	0.669	0.747	0.848	---
					F _d	1.00	0.76	0.50	0.40	0.31	0.28	0.24	0.22	0.20	0.19	---
HPAT, CL2500, Flow Down																Modified Equal Percentage Characteristic
2	47.6	1.875	38	1.5	C _v	---	2.45	7.82	16.5	24.9	32.2	37.3	40.6	42.8	44.3	0.90
					K _v	---	2.12	6.76	14.3	21.5	27.9	32.3	35.1	37.0	38.3	---
					X _T	---	0.572	0.533	0.522	0.559	0.648	0.745	0.828	0.833	0.876	---
					F _d	0.99	0.49	0.40	0.30	0.26	0.22	0.20	0.18	0.16	0.16	---

1. At 100% travel.

1. At 100% travel.

Table 21. Fisher HPAT, CL900, 1500, and 2500 (Whisper Trim III Cage, Flow Up through the Port)

HPAT, CL900 and 1500, Whisper Trim, Flow Up																	Linear Characteristic
Cage Level	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										
		mm	Inches	mm	Inches		Minimum ⁽¹⁾	10	20	30	40	50	60	70	80	90	100
A1 ⁽²⁾ ΔP/P1≤0.6	2	47.6	1.875	38	1.5	C _V	1.20	3.00	7.70	13.0	17.8	22.3	26.4	31.0	35.3	39.0	42.0
						K _V	1.04	2.59	6.66	11.2	15.4	19.3	22.8	26.8	30.5	33.7	36.3
						X _T	0.576	0.522	0.609	0.611	0.617	0.614	0.625	0.616	0.614	0.619	0.615
HPAT, CL2500, Whisper Trim, Flow Up																	Linear Characteristic
A1 ⁽²⁾ ΔP/P1≤0.6	2	47.6	1.875	38	1.5	C _V	1.20	3.00	7.70	13.0	17.8	22.3	26.4	28.7	31.4	34.0	36.2
						K _V	1.04	2.59	6.66	11.2	15.4	19.3	22.8	24.8	27.2	29.4	31.3
						X _T	0.576	0.522	0.609	0.611	0.586	0.576	0.562	0.597	0.595	0.592	0.584
1. Valve should not be required to throttle at less than the minimum coefficient for an extended time, or erosion damage to the valve seat may result. 2. Larger capacities may be available with level A1 cages depending on service conditions.																	

Table 22. Fisher HPAS, CL900, 1500, and 2500 (Linear and Equal Percentage Cages, Flow Up through the Port)

HPAS, CL900 and 1500, Linear, Flow Up																Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	38	1.5	C _V	---	3.61	11.8	23.3	35.2	45.7	54.2	61.7	68.8	73.6	0.97
					K _V	---	3.12	10.2	20.2	30.4	39.5	46.9	53.4	59.5	63.7	---
					X _T	---	0.722	0.663	0.657	0.663	0.663	0.659	0.638	0.606	0.586	---
					F _d	0.89	0.62	0.44	0.30	0.24	0.22	0.19	0.17	0.16	0.15	---
HPAS, CL2500, Linear, Flow Up																Linear Characteristic
2	47.6	1.875	38	1.5	C _V	---	3.61	11.8	23.3	33.8	41.0	46.5	50.7	53.8	56.2	0.97
					K _V	---	3.12	10.2	20.2	29.2	35.5	40.2	43.9	46.5	48.6	---
					X _T	---	0.722	0.663	0.657	0.623	0.607	0.589	0.576	0.573	0.565	---
					F _d	0.89	0.62	0.44	0.30	0.24	0.22	0.19	0.17	0.16	0.15	---
1. At 100% travel.																

Table 23. Fisher HPAS, CL900 and 1500 (Equal Percentage Cages Without Liner, Flow Down through the Port)

HPAS, Equal Percentage, Flow Down															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	19.1	0.75	19	0.75	C _V	---	0.296	0.955	1.47	1.98	2.62	3.06	3.72	4.46	5.58	0.87
					K _V	---	0.256	0.826	1.27	1.71	2.27	2.65	3.22	3.86	4.83	---
					X _T	---	0.722	0.711	0.649	0.685	0.664	0.677	0.657	0.668	0.658	---
2	19.1	0.75	19	0.75	C _V	---	0.296	0.955	1.47	1.98	2.62	3.06	3.72	4.46	5.58	0.87
					K _V	---	0.256	0.826	1.27	1.71	2.27	2.65	3.22	3.86	4.83	---
					X _T	---	0.722	0.711	0.649	0.685	0.664	0.677	0.657	0.668	0.658	---
HPAS, Modified Equal Percentage ⁽²⁾ , Flow Down															Modified Equal Percentage Characteristic	
1	19.1	0.75	29	1.125	C _V	0.269	1.07	1.67	2.30	3.28	4.51	5.73	7.07	9.11	10.7	0.70
					K _V	0.233	0.926	1.44	1.99	2.84	3.90	4.96	6.12	7.88	9.26	---
					X _T	0.964	0.688	0.709	0.715	0.699	0.690	0.688	0.641	0.531	0.455	---
2	19.1	0.75	29	1.125	C _V	0.269	1.07	1.67	2.30	3.28	4.51	5.73	7.07	9.11	10.7	0.70
					K _V	0.233	0.926	1.44	1.99	2.84	3.90	4.96	6.12	7.88	9.26	---
					X _T	0.964	0.688	0.709	0.715	0.699	0.690	0.688	0.641	0.531	0.455	---
	25.4	1	29	1.125	C _V	---	0.100	0.890	1.90	3.50	6.50	11.0	15.0	19.0	21.0	0.81
					K _V	---	0.087	0.770	1.64	3.03	5.62	9.52	13.0	16.4	18.2	---
					X _T	---	0.689	0.666	0.691	0.692	0.667	0.646	0.686	0.646	0.690	---
	31.8	1.25	29	1.125	C _V	---	0.220	1.20	2.70	5.00	9.00	15.0	22.0	27.0	31.0	0.81
					K _V	---	0.190	1.04	2.34	4.33	7.79	13.0	19.0	23.4	26.8	---
					X _T	---	0.668	0.685	0.683	0.666	0.694	0.692	0.648	0.667	0.671	---
38.1	1.5	38	1.5	C _V	---	0.880	2.80	6.30	13.5	22.5	31.0	38.0	43.5	48.0	0.81	
				K _V	---	0.761	2.42	5.45	11.7	19.5	26.8	32.9	37.6	41.5	---	
				X _T	---	0.682	0.670	0.677	0.678	0.703	0.698	0.684	0.703	0.703	---	
1. At 100% travel. 2. Characteristic is equal percentage through 75% of travel.																

1. At 100% travel.

2. Characteristic is equal percentage through 75% of travel.

Table 24. Fisher HPAS, CL2500 (Equal Percentage Cages Without Liner, Flow Down through the Port)

HPAS, Equal Percentage, Flow Down															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	19.1	0.75	19	0.75	C _V	---	0.296	0.955	1.47	1.98	2.62	3.02	3.66	4.36	5.38	0.87
					K _V	---	0.256	0.826	1.27	1.71	2.27	2.61	3.17	3.77	4.65	---
					X _T	---	0.722	0.711	0.649	0.685	0.664	0.662	0.658	0.653	0.648	---
2	19.1	0.75	19	0.75	C _V	---	0.296	0.955	1.47	1.98	2.62	3.06	3.72	4.46	5.58	0.87
					K _V	---	0.256	0.826	1.27	1.71	2.27	2.65	3.22	3.86	4.83	---
					X _T	---	0.722	0.711	0.649	0.685	0.664	0.677	0.657	0.668	0.658	---
HPAS, Modified Equal Percentage ⁽²⁾ , Flow Down															Modified Equal Percentage Characteristic	
1	19.1	0.75	29	1.125	C _V	0.269	1.07	1.67	2.30	3.28	4.51	5.73	6.93	8.06	9.73	0.70
					K _V	0.233	0.926	1.44	1.99	2.84	3.90	4.96	5.99	6.97	8.42	---
					X _T	0.964	0.688	0.709	0.715	0.600	0.542	0.574	0.580	0.584	0.469	---
2	19.1	0.75	29	1.125	C _V	0.269	1.07	1.67	2.30	3.28	4.51	5.73	7.07	9.11	10.7	0.70
					K _V	0.233	0.926	1.44	1.99	2.84	3.90	4.96	6.12	7.88	9.26	---
					X _T	0.964	0.688	0.709	0.715	0.699	0.690	0.688	0.641	0.531	0.455	---
	25.4	1	29	1.125	C _V	---	0.100	0.890	1.90	3.50	6.50	11.0	15.0	19.0	21.0	0.81
					K _V	---	0.087	0.770	1.64	3.03	5.62	9.52	13.0	16.4	18.2	---
					X _T	---	0.689	0.666	0.691	0.692	0.667	0.646	0.686	0.646	0.690	---
	31.8	1.25	29	1.125	C _V	---	0.220	1.20	2.70	5.00	9.00	15.0	22.0	27.0	31.0	0.81
					K _V	---	0.190	1.04	2.34	4.33	7.79	13.0	19.0	23.4	26.8	---
					X _T	---	0.668	0.685	0.683	0.666	0.694	0.692	0.648	0.667	0.671	---
	38.1	1.5	38	1.5	C _V	---	0.880	2.80	6.30	12.9	21.0	27.2	31.6	34.7	36.8	0.81
					K _V	---	0.761	2.42	5.45	11.2	18.2	23.5	27.3	30.0	31.8	---
					X _T	---	0.682	0.670	0.677	0.740	0.709	0.713	0.717	0.720	0.722	---
1. At 100% travel. 2. Characteristic is equal percentage through 75% of travel.																

1. At 100% travel.

2. Characteristic is equal percentage through 75% of travel.

Table 25. Fisher HPAS, CL900 and 1500 (Equal Percentage Cages With Liner, Flow Down through the Port)

HPAS, Equal Percentage, Flow Down															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	19.1	0.75	19	0.75	C _V	0.200	0.296	0.955	1.47	1.98	2.62	3.02	3.66	4.36	5.37	0.87
					K _V	0.173	0.256	0.826	1.27	1.71	2.27	2.61	3.17	3.77	4.65	---
					X _T	0.563	0.714	0.702	0.642	0.677	0.657	0.658	0.650	0.644	0.641	---
2	19.1	0.75	19	0.75	C _V	0.200	0.296	0.955	1.47	1.98	2.62	3.06	3.72	4.46	5.58	0.87
					K _V	0.173	0.256	0.826	1.27	1.71	2.27	2.65	3.22	3.86	4.83	---
					X _T	0.563	0.714	0.702	0.642	0.677	0.657	0.669	0.649	0.660	0.651	---
HPAS, Modified Equal Percentage ⁽²⁾ , Flow Down															Modified Equal Percentage Characteristic	
1	19.1	0.75	29	1.125	C _V	0.269	1.07	1.67	2.30	3.28	4.51	5.73	6.93	8.06	9.73	0.70
					K _V	0.233	0.926	1.44	1.99	2.84	3.90	4.96	5.99	6.97	8.42	---
					X _T	0.952	0.680	0.700	0.706	0.593	0.535	0.570	0.574	0.577	0.464	---
2	19.1	0.75	29	1.125	C _V	0.269	1.07	1.67	2.30	3.28	4.51	5.73	7.07	9.11	10.7	0.70
					K _V	0.233	0.926	1.44	1.99	2.84	3.90	4.96	6.12	7.88	9.26	---
					X _T	0.952	0.680	0.700	0.706	0.690	0.682	0.680	0.633	0.525	0.450	---
	25.4	1	29	1.125	C _V	---	0.100	0.890	1.90	3.50	6.50	11.0	15.0	19.0	20.0	0.81
					K _V	---	0.087	0.770	1.64	3.03	5.62	9.52	13.0	16.4	17.3	---
					X _T	---	0.681	0.658	0.682	0.684	0.659	0.639	0.678	0.638	0.682	---
	31.8	1.25	29	1.125	C _V	---	0.220	1.20	2.70	5.00	9.00	15.0	22.0	25.7	27.9	0.81
					K _V	---	0.190	1.04	2.34	4.33	7.79	13.0	19.0	22.2	24.1	---
					X _T	---	0.660	0.676	0.675	0.658	0.686	0.684	0.640	0.659	0.663	---
	38.1	1.5	38	1.5	C _V	---	0.880	2.80	6.30	13.2	21.2	27.6	33.1	37.4	40.8	0.81
					K _V	---	0.761	2.42	5.45	11.4	18.3	23.9	28.6	32.4	35.3	---
					X _T	---	0.674	0.662	0.669	0.670	0.695	0.690	0.691	0.689	0.694	---
1. At 100% travel. 2. Characteristic is equal percentage through 75% of travel.																

1. At 100% travel.

2. Characteristic is equal percentage through 75% of travel.

Table 26. Fisher HPAS, CL2500 (Equal Percentage Cages With Liner, Flow Down through the Port)

HPAS, Equal Percentage, Flow Down															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	19.1	0.75	19	0.75	C _V	0.200	0.296	0.955	1.47	1.98	2.62	3.02	3.66	4.36	5.37	0.87
					K _V	0.173	0.256	0.826	1.27	1.71	2.27	2.61	3.17	3.77	4.65	---
					X _T	0.569	0.722	0.711	0.649	0.685	0.664	0.665	0.658	0.653	0.648	---
2	19.1	0.75	19	0.75	C _V	0.200	0.296	0.955	1.47	1.98	2.62	3.06	3.72	4.46	5.58	0.87
					K _V	0.173	0.256	0.826	1.27	1.71	2.27	2.65	3.22	3.86	4.83	---
					X _T	0.569	0.722	0.711	0.649	0.685	0.664	0.677	0.657	0.668	0.658	---
HPAS, Modified Equal Percentage ⁽²⁾ , Flow Down															Modified Equal Percentage Characteristic	
1	19.1	0.75	29	1.125	C _V	0.269	1.07	1.67	2.30	3.28	4.51	5.73	6.93	8.06	9.73	0.70
					K _V	0.233	0.926	1.44	1.99	2.84	3.90	4.96	5.99	6.97	8.42	---
					X _T	0.964	0.688	0.709	0.715	0.600	0.542	0.574	0.580	0.584	0.469	---
2	19.1	0.75	29	1.125	C _V	0.269	1.07	1.67	2.30	3.28	4.51	5.73	7.07	9.11	10.7	0.70
					K _V	0.233	0.926	1.44	1.99	2.84	3.90	4.96	6.12	7.88	9.26	---
					X _T	0.964	0.688	0.709	0.715	0.699	0.690	0.688	0.641	0.531	0.455	---
	25.4	1	29	1.125	C _V	---	0.100	0.890	1.90	3.50	6.50	11.0	15.0	19.0	20.0	0.81
					K _V	---	0.087	0.770	1.64	3.03	5.62	9.52	13.0	16.4	17.3	---
					X _T	---	0.689	0.666	0.691	0.692	0.667	0.646	0.686	0.646	0.690	---
	31.8	1.25	29	1.125	C _V	---	0.220	1.20	2.70	5.00	9.00	15.0	22.0	25.7	27.9	0.81
					K _V	---	0.190	1.04	2.34	4.33	7.79	13.0	19.0	22.2	24.1	---
					X _T	---	0.668	0.685	0.683	0.666	0.694	0.692	0.648	0.667	0.671	---
	38.1	1.5	38	1.5	C _V	---	0.880	2.80	6.30	12.9	21.0	27.2	30.0	31.2	31.3	0.81
					K _V	---	0.761	2.42	5.45	11.2	18.2	23.5	25.9	27.0	27.1	---
					X _T	---	0.682	0.670	0.677	0.743	0.707	0.714	0.716	0.716	0.726	---
1. At 100% travel. 2. Characteristic is equal percentage through 75% of travel.																

1. At 100% travel.

2. Characteristic is equal percentage through 75% of travel.

Table 27. Fisher HPAS, CL900 and 1500 (Micro-Flute Valve Plug)

HPAS, CL900 and 1500, Micro-Flute, Flow Up															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	9.5	0.375	19	0.75	C _V	0.066	0.121	0.200	0.314	0.470	0.674	0.945	1.30	1.74	2.24	0.81
					K _V	0.057	0.105	0.173	0.272	0.407	0.583	0.817	1.12	1.51	1.94	---
					X _T	0.944	0.744	0.652	0.600	0.586	0.585	0.583	0.584	0.582	0.585	---
	12.7	0.5	19	0.75	C _V	0.105	0.184	0.314	0.488	0.716	1.04	1.53	2.30	3.20	4.21	0.84
					K _V	0.091	0.159	0.272	0.422	0.619	0.900	1.32	1.99	2.77	3.64	---
					X _T	0.974	0.792	0.654	0.638	0.630	0.580	0.547	0.497	0.523	0.549	---
HPAS, CL900 and 1500, Micro-Flute, Flow Down With or Without Liner															Equal Percentage Characteristic	
1 and 2	6.4 1 Flute	0.25 1 Flute	19	0.75	C _V	0.0290	0.0377	0.0470	0.0624	0.0874	0.124	0.175	0.243	0.330	0.407	0.62
					K _V	0.025	0.033	0.041	0.054	0.076	0.107	0.151	0.210	0.285	0.352	---
					X _T	0.990	0.975	0.867	0.765	0.659	0.569	0.494	0.450	0.450	0.550	---
	12.7 1 Flute	0.5 1 Flute	19	0.75	C _V	0.078	0.090	0.116	0.161	0.228	0.320	0.445	0.641	0.950	1.40	0.72
					K _V	0.067	0.078	0.100	0.139	0.197	0.277	0.385	0.554	0.822	1.211	---
					X _T	0.995	0.990	0.986	0.932	0.846	0.775	0.719	0.653	0.581	0.537	---
	12.7 2 Flutes	0.5 2 Flutes	19	0.75	C _V	0.128	0.161	0.257	0.394	0.539	0.700	0.947	1.38	2.07	2.93	0.71
					K _V	0.111	0.139	0.222	0.341	0.466	0.605	0.819	1.19	1.79	2.53	---
					X _T	0.678	0.736	0.552	0.484	0.516	0.586	0.610	0.556	0.490	0.488	---
1. At 100% travel.																

1. At 100% travel.

Table 28. Fisher HPAS, CL900, 1500, and 2500 (Micro-Flat Anti-Cavitation Valve Plug With or Without Liner, Flow Down through the Port)

HPAS, CL900, 1500, and 2500, Micro-Flat Anti-Cavitation, Flow Down With or Without Liner																Linear Characteristic
Valve Size, NPS	Port Diameter ⁽²⁾		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1 and 2	9.5 2 Flats	0.375 2 Flats	19	0.75	C _V	0.010	0.017	0.077	0.162	0.264	0.381	0.510	0.651	0.801	0.961	0.82
					K _V	0.009	0.015	0.067	0.140	0.228	0.330	0.441	0.563	0.693	0.831	---
					X _T	0.648	0.678	0.678	0.678	0.678	0.678	0.678	0.678	0.678	0.678	---
	12.7 2 Flats	0.5 2 Flats	19	0.75	C _V	0.027	0.031	0.144	0.301	0.491	0.708	0.947	1.21	1.48	1.71	0.82
					K _V	0.023	0.027	0.125	0.260	0.425	0.612	0.819	1.05	1.28	1.48	---
					X _T	0.703	0.678	0.678	0.678	0.678	0.678	0.678	0.678	0.678	0.678	---
	19.1 2 Flats	0.75 2 Flats	19	0.75	C _V	0.067	0.095	0.224	0.452	0.770	1.14	1.51	2.00	2.50	2.92	0.82
					K _V	0.058	0.082	0.194	0.391	0.666	0.986	1.31	1.73	2.16	2.53	---
					X _T	0.931	0.929	0.919	0.905	0.830	0.783	0.800	0.751	0.726	0.681	---
2	25.4 2 Flats	1 2 Flats	29	1.125	C _V	0.018	0.237	0.728	1.40	2.18	3.05	4.06	5.26	6.58	7.61	0.81
					K _V	0.016	0.205	0.630	1.21	1.89	2.64	3.51	4.55	5.69	6.58	---
					X _T	0.911	0.763	0.676	0.671	0.680	0.679	0.659	0.615	0.579	0.588	---

1. At 100% travel.

2. Micro-Flat Anti-Cavitation trims use a shutoff port diameter which is 0.125 inch larger than the flowing port diameter. Use the shutoff port diameter for actuator sizing.

1. At 100% travel.

2. Micro-Flat Anti-Cavitation trims use a shutoff port diameter which is 0.125 inch larger than the flowing port diameter. Use the shutoff port diameter for actuator sizing.

Note: If ΔP exceeds 1000 psig, the life span of the Micro-Flat trim may be shortened.

Table 29. Fisher HPAS, CL900 and 1500 (Micro-Form Valve Plug, Flow Up through the Port)

HPAS, Micro-Form, Flow Up																Equal Percentage Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	6.4	0.25	19	0.75	C _v	0.089	0.123	0.175	0.242	0.331	0.456	0.643	0.910	1.24	1.58	0.93
					K _v	0.077	0.106	0.151	0.209	0.286	0.394	0.556	0.787	1.07	1.37	---
					X _T	0.658	0.666	0.611	0.603	0.613	0.613	0.588	0.578	0.616	0.651	---
	12.7	0.5	19	0.75	C _v	0.259	0.391	0.570	0.815	1.15	1.59	2.22	3.13	4.39	5.75	0.98
					K _v	0.224	0.338	0.493	0.705	0.995	1.38	1.92	2.71	3.80	4.97	---
					X _T	0.633	0.606	0.576	0.572	0.576	0.593	0.604	0.624	0.662	0.691	---
	19.1	0.75	19	0.75	C _v	0.464	0.695	0.987	1.43	2.12	3.16	4.71	6.89	9.56	11.4	0.97
					K _v	0.401	0.601	0.854	1.24	1.83	2.73	4.07	5.96	8.27	9.86	---
					X _T	0.670	0.628	0.624	0.615	0.600	0.594	0.600	0.622	0.669	0.729	---
2	6.4	0.25	19	0.75	C _v	0.089	0.123	0.175	0.242	0.331	0.456	0.643	0.910	1.24	1.58	0.93
					K _v	0.077	0.106	0.151	0.209	0.286	0.394	0.556	0.787	1.07	1.37	---
					X _T	0.658	0.666	0.611	0.603	0.613	0.613	0.588	0.578	0.616	0.651	---
	12.7	0.5	19	0.75	C _v	0.259	0.391	0.570	0.815	1.15	1.59	2.22	3.13	4.39	5.75	0.98
					K _v	0.224	0.338	0.493	0.705	0.995	1.38	1.92	2.71	3.80	4.97	---
					X _T	0.633	0.606	0.576	0.572	0.576	0.593	0.604	0.624	0.662	0.691	---
	19.1	0.75	19	0.75	C _v	0.464	0.695	0.987	1.43	2.12	3.16	4.71	6.89	9.56	11.4	0.97
					K _v	0.401	0.601	0.854	1.24	1.83	2.73	4.07	5.96	8.27	9.86	---
					X _T	0.670	0.628	0.624	0.615	0.600	0.594	0.600	0.622	0.669	0.729	---

1. At 100% travel.

Table 30. Fisher HPAS, CL900 and 1500 (Micro-Form Valve Plug, Flow Up through the Port)

HPAS, Micro-Form, Flow Up																Modified Equal Percentage Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	19.1	0.75	29	1.125	C _v	0.610	1.10	1.79	3.01	5.75	9.07	11.2	12.1	13.4	14.5	0.95
					K _v	0.528	0.952	1.55	2.60	4.97	9.07	9.69	10.5	11.6	12.5	---
					X _T	0.563	0.559	0.567	0.567	0.567	0.567	0.567	0.567	0.555	0.567	---
	25.4	1	29	1.125	C _v	0.973	1.86	3.18	5.86	9.22	12.4	14.6	16.1	18.2	19.5	0.89
					K _v	0.842	1.61	2.75	5.07	7.98	10.7	12.6	13.9	15.7	16.9	---
					X _T	0.680	0.634	0.568	0.571	0.571	0.571	0.571	0.571	0.567	0.571	---
2	25.4	1	29	1.125	C _v	0.973	1.86	3.18	5.86	10.5	16.6	21.8	24.8	26.3	27.5	0.89
					K _v	0.842	1.61	2.75	5.07	9.08	14.4	18.9	21.5	22.7	23.8	---
					X _T	0.680	0.634	0.568	0.571	0.591	0.635	0.667	0.660	0.602	0.553	---
	38.1	1.25	29	1.125	C _v	1.09	1.87	3.89	8.77	17.4	26.4	31.6	34.6	40.6	47.6	0.98
					K _v	0.943	1.62	3.36	7.59	15.1	22.8	27.3	29.9	35.1	41.2	---
					X _T	0.702	0.630	0.524	0.547	0.653	0.729	0.753	0.761	0.659	0.479	---
	31.8	1.5	38	1.5	C _v	2.43	4.43	9.01	17.2	27.9	37.5	44.2	50.0	56.9	58.3	0.97
					K _v	2.10	3.83	7.79	14.9	24.1	32.4	38.2	43.3	49.2	50.4	---
					X _T	0.619	0.520	0.499	0.583	0.691	0.749	0.758	0.723	0.640	0.623	---

1. At 100% travel.

Table 31. Fisher HPAS, CL2500 (Micro-Form Valve Plug, Flow Up through the Port)

HPAS, Micro-Form, Flow Up															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	6.4	0.25	19	0.75	C _v	0.089	0.123	0.175	0.242	0.331	0.456	0.643	0.910	1.24	1.58	0.93
					K _v	0.077	0.106	0.151	0.209	0.286	0.394	0.556	0.787	1.07	1.37	---
					X _T	0.658	0.666	0.611	0.603	0.613	0.613	0.588	0.578	0.616	0.651	---
	12.7	0.5	19	0.75	C _v	0.259	0.391	0.570	0.815	1.15	1.59	2.22	3.13	4.39	5.75	0.98
					K _v	0.224	0.338	0.493	0.705	0.995	1.38	1.92	2.71	3.80	4.97	---
					X _T	0.633	0.606	0.576	0.572	0.576	0.593	0.604	0.624	0.662	0.691	---
	19.1	0.75	19	0.75	C _v	0.464	0.695	0.987	1.43	2.12	3.16	4.71	6.89	9.37	10.9	0.97
					K _v	0.401	0.601	0.854	1.24	1.83	2.73	4.07	5.96	8.11	9.43	---
					X _T	0.670	0.628	0.624	0.615	0.600	0.594	0.600	0.622	0.670	0.737	---
2	6.4	0.25	19	0.75	C _v	0.089	0.123	0.175	0.242	0.331	0.456	0.643	0.910	1.24	1.58	0.93
					K _v	0.077	0.106	0.151	0.209	0.286	0.394	0.556	0.787	1.07	1.37	---
					X _T	0.658	0.666	0.611	0.603	0.613	0.613	0.588	0.578	0.616	0.651	---
	12.7	0.5	19	0.75	C _v	0.259	0.391	0.570	0.815	1.15	1.59	2.22	3.13	4.39	5.75	0.98
					K _v	0.224	0.338	0.493	0.705	0.995	1.38	1.92	2.71	3.80	4.97	---
					X _T	0.633	0.606	0.576	0.572	0.576	0.593	0.604	0.624	0.662	0.691	---
	19.1	0.75	19	0.75	C _v	0.464	0.695	0.987	1.43	2.12	3.16	4.71	6.89	9.56	11.4	0.97
					K _v	0.401	0.601	0.854	1.24	1.83	2.73	4.07	5.96	8.27	9.86	---
					X _T	0.670	0.628	0.624	0.615	0.600	0.594	0.600	0.622	0.669	0.729	---
	25.4	1	19	0.75	C _v	0.927	1.35	1.87	2.64	3.88	5.81	8.66	12.6	16.6	18.9	0.91
					K _v	0.802	1.17	1.62	2.28	3.36	5.03	7.49	10.9	14.4	16.3	---
					X _T	0.431	0.636	0.594	0.603	0.615	0.600	0.566	0.540	0.581	0.676	---
1. At 100% travel.																

1. At 100% travel.

Table 32. Fisher HPAS, CL2500 (Micro-Form Valve Plug, Flow Up through the Port)

HPAS, Micro-Form, Flow Up															Modified Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	25.4	1	29	1.125	C _v	0.973	1.86	3.18	5.86	8.94	11.9	13.9	14.1	14.2	14.3	0.89
					K _v	0.842	1.61	2.75	5.07	7.73	10.3	12.0	12.2	12.3	12.4	---
					X _T	0.680	0.634	0.568	0.571	0.568	0.569	0.569	0.569	0.569	0.569	---
2	25.4	1	29	1.125	C _v	0.973	1.86	3.18	5.86	10.5	16.1	20.7	23.3	24.6	25.6	0.89
					K _v	0.842	1.61	2.75	5.07	9.08	13.9	17.9	20.2	21.3	22.1	---
					X _T	0.680	0.634	0.568	0.571	0.591	0.635	0.669	0.661	0.601	0.559	---
	31.8	1.25	29	1.125	C _v	1.09	1.87	3.89	8.77	16.9	24.6	29.1	31.1	34.5	36.6	0.98
					K _v	0.943	1.62	3.36	7.59	14.6	21.3	25.2	26.9	29.8	31.7	---
					X _T	0.702	0.630	0.524	0.547	0.651	0.734	0.747	0.763	0.655	0.614	---
	38.1	1.5	38	1.5	C _v	2.43	4.43	9.01	16.7	25.9	32.6	35.4	38.5	41.0	43.0	0.97
					K _v	2.10	3.83	7.79	14.4	22.4	28.2	30.6	33.3	35.5	37.2	---
					X _T	0.619	0.520	0.499	0.581	0.693	0.747	0.751	0.721	0.646	0.587	---
1. At 100% travel.																

1. At 100% travel.

Table 33. Fisher HPAS, CL900, 1500, and 2500 (Whisper Trim III Cage, Flow Up through the Port)

HPAS, CL900 and 1500, Whisper Trim III, Flow Up																	Linear Characteristic
Cage Level	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										
		mm	Inches	mm	Inches		Minimum ⁽¹⁾	10	20	30	40	50	60	70	80	90	100
A1 ⁽²⁾ ΔP/P1≤0.6	2	47.6	1.875	38	1.5	C _v	1.00	2.50	7.50	12.8	17.7	22.3	26.6	31.2	35.5	39.5	42.6
						K _v	0.865	2.16	6.49	11.1	15.3	19.3	23.0	27.0	30.7	34.2	36.8
						X _T	0.727	0.686	0.605	0.609	0.613	0.607	0.613	0.606	0.607	0.603	0.607
HPAS, CL2500, Whisper Trim III, Flow Up																	Linear Characteristic
A1 ⁽²⁾ ΔP/P1≤0.6	2	47.6	1.875	38	1.5	C _v	1.00	2.50	7.50	12.8	17.7	22.3	26.6	28.7	31.4	34.0	36.2
						K _v	0.865	2.16	6.49	11.1	15.3	19.3	23.0	24.8	27.2	29.4	31.3
						X _T	0.727	0.686	0.605	0.609	0.593	0.576	0.554	0.597	0.595	0.592	0.595
1. Valve should not be required to throttle at less than the minimum coefficient for an extended time, or erosion damage to the valve seat may result. 2. Larger capacities may be available with level A1 cages depending on service conditions.																	

Table 34. Fisher HPAS and HPAT, CL900, 1500, and 2500 (Cavitrol III Cages, Flow Down through the Port)

HPAS and HPAT, CL900 and 1500, Cavitrol III, Flow Down																			Linear Characteristic
Trim Stage	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Minimum Throttling $C_v^{(2)}$	Valve Opening—Percent of Total Travel										$F_L^{(3)}$	
		mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100		
Two Stage	1 ⁽¹⁾	22.2	0.875 ⁽¹⁾	38	1.5	C_v	0.360	---	0.836	1.80	2.74	3.64	4.51	5.36	6.18	6.91	7.39	0.98	
						K_v	0.311	---	0.723	1.56	2.37	3.15	3.90	4.64	5.35	5.98	6.39	---	
	2	44.4	1.75	50	2	C_v	0.580	1.07	1.97	3.29	4.86	6.58	8.36	10.1	11.7	13.0	14.0	0.98	
						K_v	0.502	0.926	1.70	2.85	4.20	5.69	7.23	8.74	10.1	11.2	12.1	---	
Three Stage	2 ⁽¹⁾	25.4	1 ⁽¹⁾	50	2	C_v	0.590	0.272	1.10	1.98	2.82	3.63	4.46	5.30	6.07	6.61	6.73	0.99	
						K_v	0.510	0.235	0.952	1.71	2.44	3.14	3.86	4.58	5.25	5.72	5.82	---	
HPAS and HPAT, CL2500, Cavitrol III, Flow Down																			Linear Characteristic
Two Stage	1 ⁽¹⁾	22.2	0.875 ⁽¹⁾	38	1.5	C_v	0.360	---	0.836	1.80	2.74	3.64	4.51	5.36	5.87	6.53	6.91	0.98	
						K_v	0.311	---	0.723	1.56	2.37	3.15	3.90	4.64	5.08	5.65	5.98	---	
	2	44.4	1.75	50	2	C_v	0.580	1.07	1.97	3.29	4.86	6.58	8.36	10.1	11.7	13.0	14.0	0.98	
						K_v	0.502	0.926	1.70	2.85	4.20	5.69	7.23	8.74	10.1	11.2	12.1	---	
Three Stage	2 ⁽¹⁾	25.4	1 ⁽¹⁾	50	2	C_v	0.590	0.272	1.10	1.98	2.82	3.63	4.46	5.30	6.07	6.61	6.73	0.99	
						K_v	0.510	0.235	0.952	1.71	2.44	3.14	3.86	4.58	5.25	5.72	5.82	---	
1. Cavitrol III trim in the NPS 1, two stage and the NPS 2, three stage are unbalanced valve plugs. These sizes and constructions are HPS valves; all others in this table are HPT valves. 2. Valves should not be required to throttle at a C_v less than the specified minimum C_v for an extended period. Erosion damage to the valve seats may result. 3. At 100% travel.																			

Table 35. Fisher HPD, CL900 and 1500 (Linear and Equal Percentage Cages, Flow Down through the Port)

HPD, CL900 and 1500, Linear															Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L (1)
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	38	1.5	C _v	---	3.49	12.5	22.9	31.8	38.4	43.0	46.7	49.9	52.2	0.91
					K _v	---	3.02	10.8	19.8	27.5	33.2	37.2	40.4	43.2	45.2	---
					X _T	---	0.811	0.632	0.682	0.743	0.829	0.780	0.743	0.726	0.695	---
					F _d	0.89	0.62	0.44	0.30	0.24	0.22	0.19	0.17	0.16	0.15	---
3	73.0	2.875	50	2	C _v	---	8.72	31.5	55.1	74.6	89.4	101	110	117	121	0.93
					K _v	---	7.54	27.2	47.7	64.5	77.3	87.4	95.2	101	105	---
					X _T	---	0.589	0.580	0.653	0.728	0.775	0.795	0.791	0.777	0.773	---
					F _d	0.48	0.28	0.21	0.17	0.15	0.13	0.12	0.11	0.11	0.10	---
4	92.1	3.625	50	2	C _v	6.91	26.4	54.7	86.4	117	143	165	182	194	201	0.91
					K _v	5.98	22.8	47.3	74.7	101	124	143	157	168	174	---
					X _T	0.327	0.581	0.576	0.509	0.525	0.602	0.673	0.708	0.714	0.726	---
					F _d	0.28	0.21	0.15	0.13	0.11	0.098	0.090	0.082	0.077	0.073	---
6	136.5	5.375	76	3	C _v	8.78	63.3	149	231	298	350	385	408	424	425	0.91
					K _v	7.59	54.8	129	200	258	303	333	353	367	368	---
					X _T	0.763	0.613	0.544	0.574	0.621	0.671	0.721	0.745	0.709	0.726	---
					F _d	0.24	0.12	0.094	0.076	0.067	0.058	0.054	0.050	0.047	0.046	---
HPD, CL900 and 1500, Equal Percentage															Equal Percentage Characteristic	
2	47.6	1.875	29	1.125	C _v	---	1.02	3.26	7.53	13.3	19.8	26.4	32.0	36.2	41.0	0.93
					K _v	---	0.882	2.82	6.51	11.5	17.1	22.8	27.7	31.3	35.5	---
					X _T	---	0.745	0.619	0.595	0.587	0.593	0.633	0.721	0.791	0.791	---
					F _d	1.00	0.76	0.50	0.40	0.31	0.28	0.24	0.22	0.20	0.19	---
3	73.0	2.875	38	1.5	C _v	---	1.21	4.21	11.3	23.0	37.6	53.2	69.5	85.3	92.7	0.92
					K _v	---	1.05	3.64	9.77	19.9	32.5	46.0	60.1	73.8	80.2	---
					X _T	---	0.954	0.761	0.600	0.558	0.592	0.661	0.705	0.706	0.768	---
					F _d	1.00	0.54	0.44	0.31	0.23	0.19	0.17	0.15	0.14	0.13	---
4	92.1	3.625	38	1.5	C _v	3.12	7.35	13.9	23.4	37.9	60.1	90.6	123	147	165	0.85
					K _v	2.70	6.36	12.0	20.2	32.8	52.0	78.4	106	127	143	---
					X _T	0.676	0.551	0.524	0.488	0.449	0.443	0.463	0.509	0.569	0.683	---
					F _d	---	0.43	0.33	0.24	0.18	0.15	0.13	0.11	0.096	0.088	---
6	136.5	5.375	63.5	2.5	C _v	3.90	13.3	23.1	36.2	63.0	105	156	217	280	319	0.82
					K _v	3.37	11.5	20.0	31.3	54.5	90.8	135	188	242	276	---
					X _T	0.961	0.686	0.615	0.584	0.540	0.513	0.496	0.480	0.513	0.593	---
					F _d	0.38	0.34	0.25	0.20	0.15	0.12	0.098	0.084	0.073	0.066	---
HPD, CL900 and 1500, Modified Equal Percentage(2)															Modified Equal Percentage Characteristic	
2	47.6	1.875	38	1.5	C _v	---	2.28	7.52	15.7	24.1	31.6	38.2	43.5	46.7	49.0	0.93
					K _v	---	1.97	6.50	13.6	20.8	27.3	33.0	37.6	40.4	42.4	---
					X _T	---	0.641	0.571	0.584	0.634	0.698	0.778	0.803	0.771	0.770	---
					F _d	0.99	0.49	0.40	0.30	0.26	0.22	0.20	0.18	0.16	0.16	---
3	73.0	2.875	50	2	C _v	0.475	3.07	11.8	26.8	46.6	69.3	89.5	100	103	114	0.95
					K _v	0.411	2.66	10.2	23.2	40.3	59.9	77.4	86.5	89.1	98.6	---
					X _T	0.949	0.712	0.550	0.604	0.682	0.697	0.706	0.762	0.856	0.783	---
					F _d	0.78	0.49	0.31	0.22	0.18	0.15	0.14	0.12	0.11	0.11	---
4	92.1	3.625	50	2	C _v	4.33	11.3	23.3	45.0	79.6	121	155	176	192	203	0.89
					K _v	3.75	9.77	20.2	38.9	68.9	105	134	152	166	176	---
					X _T	0.624	0.523	0.482	0.450	0.453	0.502	0.599	0.696	0.723	0.735	---
					F _d	0.29	0.34	0.24	0.18	0.13	0.11	0.094	0.084	0.077	0.073	---
6	136.5	5.375	76	3	C _v	5.22	16.6	30.8	55.0	100	168	241	299	351	378	0.89
					K _v	4.52	14.4	26.6	47.6	86.5	145	208	259	304	327	---
					X _T	0.883	0.725	0.571	0.597	0.592	0.514	0.526	0.623	0.667	0.725	---
					F _d	0.43	0.28	0.22	0.16	0.12	0.095	0.079	0.068	0.060	0.057	---
1. At 100% travel. 2. Characteristic is equal percentage through 75% of travel.																

1. At 100% travel.

2. Characteristic is equal percentage through 75% of travel.

Table 36. Fisher HPD and HPT, CL2500 (Linear and Equal Percentage Cages, Flow Down through the Port)

HPD, CL2500, Linear															Linear Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	25.4	1	C _v	0.686	0.937	4.03	10.1	17.3	24.0	29.0	32.6	35.5	37.9	0.81
					K _v	0.593	0.811	3.49	8.74	15.0	20.8	25.1	28.2	30.7	32.8	---
					X _T	0.888	0.675	0.533	0.566	0.616	0.656	0.702	0.733	0.747	0.722	---
HPD, CL2500, Equal Percentage															Equal Percentage Characteristic	
2	47.6	1.875	25.4	1	C _v	0.596	1.09	2.58	5.61	10.1	15.4	20.9	26.2	30.8	34.7	0.83
					K _v	0.516	0.943	2.23	4.85	8.74	13.3	18.1	22.7	26.6	30.0	---
					XT	0.816	0.667	0.631	0.602	0.588	0.594	0.633	0.686	0.721	0.719	---
HPD, CL2500, Modified Equal Percentage															Modified Equal Percentage Characteristic	
2	47.6	1.875	28.6	1.125	C _v	0.622	1.34	3.52	7.73	13.4	19.5	25.5	31.0	34.7	38.0	0.81
					K _v	0.538	1.16	3.04	6.69	11.6	16.9	22.1	26.8	30.0	32.9	---
					X _T	0.667	0.664	0.640	0.570	0.586	0.635	0.669	0.712	0.757	0.707	---
1. At 100% travel.																

Table 37. Fisher HPD, CL900, 1500, and 2500 (Whisper Trim III Cages, Flow Up through the Port)

HPD, Whisper Trim III--CL900 and 1500, Flow Up																	Linear Characteristic	
Cage Level	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel											
		mm	Inches	mm	Inches		Minimum ⁽¹⁾	10	20	30	40	50	60	70	80	90	100	
A1 ⁽²⁾ ΔP/P1≤0.6	2	47.6	1.875	38	1.5	C _V	1.20	3.00	7.70	13.0	17.8	22.3	26.4	31.0	35.3	39.0	42.0	
						K _V	1.04	2.59	6.66	11.2	15.4	19.3	22.8	26.8	30.5	33.7	36.3	
						X _T	0.569	0.516	0.602	0.604	0.610	0.607	0.618	0.608	0.607	0.612	0.608	
	3	73.0	2.875	50	2	C _V	1.26	6.57	24.1	42.1	58.9	74.0	86.8	97.4	105	110	111	
						K _V	1.09	5.68	20.8	36.4	50.9	64.0	75.1	84.3	90.8	95.2	96.0	
						X _T	0.826	0.727	0.610	0.560	0.558	0.588	0.641	0.687	0.723	0.738	0.772	
	4	92.1	3.625	50	2	C _V	1.88	7.56	27.3	50.1	71.5	90.8	109	126	142	155	162	
						K _V	1.63	6.54	23.6	43.3	61.8	78.5	94.3	109	123	134	140	
						X _T	0.538	0.625	0.586	0.545	0.519	0.520	0.542	0.577	0.614	0.640	0.674	
	6	136.5	5.375	76	3	C _V	13.8	28.6	66.4	103	142	180	220	253	284	308	324	
						K _V	11.9	24.7	57.4	89.1	123	156	190	219	246	266	280	
						X _T	0.478	0.423	0.513	0.533	0.525	0.557	0.535	0.543	0.560	0.598	0.627	
HPD, Whisper Trim III--CL2500, Flow Up																	Linear Characteristic	
A1 ⁽²⁾ ΔP/P1≤0.6	2	47.6	1.875	38	1.5	C _V	---	3.1	8.4	13.1	17.3	21.4	25.1	28.3	30.8	32.9	34.9	
						K _V	---	2.68	7.27	11.3	15.0	18.5	21.7	24.5	26.6	28.5	30.2	
						X _T	0.569	0.516	0.602	0.604	0.610	0.607	0.618	0.608	0.607	0.612	0.608	
HPD, Whisper Trim III--CL900 and 1500, Flow Up																	Linear Characteristic	
B1 ΔP/P1≤.75	3	73.0	2.875	50	2	C _V	0.796	3.00	9.00	14.4	18.6	23.4	28.5	34.6	40.2	45.0	48.8	
						K _V	0.689	2.59	7.79	12.5	16.1	20.2	24.7	29.9	34.8	38.9	42.2	
						X _T	0.796	0.615	0.618	0.592	0.622	0.622	0.633	0.620	0.624	0.622	0.622	
B3 ΔP/P1≤.75	4	92.1	3.625	50	2	C _V	3.50	8.00	20.0	30.0	40.0	52.0	62.0	73.0	82.0	88.9	88.9	
						K _V	3.03	6.92	17.3	25.9	34.6	45.0	53.6	63.1	70.9	76.9	76.9	
						X _T	0.617	0.591	0.531	0.524	0.517	0.513	0.509	0.517	0.527	0.522	0.522	
B3 ΔP/P1≤.75	6	136.5	5.375	76	3	F _d	---	0.13	0.087	0.062	0.053	0.048	0.042	0.039	0.036	0.034	0.034	
						C _V	8.00	13	30	50	69	87	107	125	143	160	166	
						K _V	6.92	11.2	25.9	43.3	59.7	75.3	92.6	108	124	138	144	
C3	4	92.1	3.625	50	2	X _T	0.610	0.577	0.580	0.548	0.552	0.563	0.545	0.554	0.552	0.555	0.554	
						F _d	---	0.087	0.051	0.042	0.034	0.031	0.028	0.026	0.024	0.022	0.022	
						C _V	3.50	8.00	15.0	21.5	28.0	34.4	41.0	47.3	53.5	56.5	56.8	
C3	6	136.5	5.375	76	3	K _V	3.03	6.92	13.0	18.6	24.2	29.8	35.5	40.9	46.3	48.9	49.1	
						X _T	0.617	0.526	0.516	0.530	0.530	0.539	0.535	0.540	0.538	0.540	0.540	
						F _d	---	0.14	0.11	0.079	0.064	0.060	0.053	0.047	0.046	0.042	0.042	
C3	4	73.0	2.875	50	2	C _V	8.00	8.30	20.5	33.0	44.3	57.0	69.0	83.0	96.5	108	112	
						K _V	6.92	7.18	17.7	28.5	38.3	49.3	59.7	71.8	83.5	93.4	96.9	
						X _T	0.563	0.567	0.575	0.572	0.572	0.556	0.568	0.563	0.561	0.559	0.563	
D3	6	111.1	4.375	76	3	F _d	---	0.093	0.067	0.051	0.045	0.039	0.036	0.032	0.031	0.029	0.028	
						C _V	2.30	4.00	7.90	11.5	15.2	18.8	22.8	27.0	30.8	33.7	37.1	
						K _V	1.99	3.46	6.83	9.95	13.1	16.3	19.7	23.4	26.6	29.2	32.1	
D3	6	111.1	4.375	76	3	X _T	0.554	0.517	0.525	0.540	0.526	0.533	0.536	0.534	0.530	0.533	0.530	
						C _V	2.30	7.00	14.0	20.7	28.0	34.8	41.6	48.5	55.7	62.5	69.6	
						K _V	1.99	6.05	12.1	17.9	24.2	30.1	36.0	42.0	48.2	54.1	60.2	
D3	6	111.1	4.375	76	3	X _T	0.579	0.563	0.557	0.572	0.557	0.569	0.564	0.566	0.562	0.566	0.564	
1. Valve should not be required to throttle at less than the minimum coefficient for an extended time, or erosion damage to the valve seat may result. 2. Larger capacities may be available with level A1 cages depending on service conditions.																		

1. Valve should not be required to throttle at less than the minimum coefficient for an extended time, or erosion damage to the valve seat may result.

2. Larger capacities may be available with level A1 cages depending on service conditions.

Notes: The coefficients on this page are also appropriate for the HPT.

Table 38. Fisher HPS, CL900, 1500, and 2500 (Linear and Equal Percentage Cages, Flow Up through the Port)

HPS, CL900 and 1500, Flow Up																Linear Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
2	47.6	1.875	38	1.5	C _V	---	3.56	11.7	23.0	33.9	42.3	47.5	50.7	53.4	54.6	0.98
					K _V	---	3.08	10.1	19.9	29.3	36.6	41.1	43.9	46.2	47.2	---
					X _T	---	0.767	0.681	0.658	0.666	0.693	0.718	0.728	0.719	0.711	---
					F _d	0.89	0.62	0.44	0.30	0.24	0.22	0.19	0.17	0.16	0.15	---
HPS, CL2500, Flow Up																Linear Characteristic
2	47.6	1.875	25	1	C _V	0.645	0.996	3.51	8.74	15.9	23.5	30.0	34.3	37.0	40.9	>0.96
					K _V	0.558	0.862	3.04	7.56	13.8	20.3	26.0	29.7	32.0	35.4	---
					X _T	0.905	0.813	0.715	0.701	0.703	0.704	0.701	0.699	0.699	0.710	---
HPS, CL900 and 1500, Flow Up																Equal Percentage Characteristic
2	47.6	1.875	29	1.125	C _V	---	1.09	3.04	6.77	12.2	18.9	26.7	34.5	40.5	45.8	0.92
					K _V	---	0.943	2.63	5.86	10.6	16.3	23.1	29.8	35.0	39.6	---
					X _T	---	0.357	0.670	0.717	0.670	0.629	0.598	0.597	0.632	0.652	---
					F _d	1.00	0.76	0.50	0.40	0.31	0.28	0.24	0.22	0.20	0.19	---
HPS, CL2500, Flow Up																Equal Percentage Characteristic
2	47.6	1.875	25	1	C _V	0.653	0.977	2.35	5.14	9.18	14.2	20.1	26.2	30.7	35.7	>0.96
					K _V	0.565	0.845	2.03	4.45	7.94	12.3	17.4	22.7	26.6	30.9	---
					X _T	0.997	0.912	0.785	0.708	0.680	0.690	0.733	0.763	0.768	0.751	---
HPS, CL900 and 1500, Flow Up																Modified Equal Percentage Characteristic
2	47.6	1.875	38	1.5	C _V	---	2.19	6.69	14.5	24.1	33.7	42.4	48.9	51.9	54.4	0.95
					K _V	---	1.89	5.79	12.5	20.8	29.2	36.7	42.3	44.9	47.1	---
					X _T	---	0.594	0.741	0.648	0.592	0.602	0.641	0.660	0.663	0.670	---
					F _d	0.99	0.49	0.40	0.30	0.26	0.22	0.20	0.18	0.16	0.16	---
HPS, CL2500, Flow Up																Modified Equal Percentage Characteristic
2	47.6	1.875	29	1.125	C _V	0.654	1.21	3.18	7.07	12.4	18.4	25.1	31.5	35.6	40.0	>0.96
					K _V	0.566	1.05	2.75	6.12	10.7	15.9	21.7	27.2	30.8	34.6	---
					X _T	0.998	0.595	0.430	0.374	0.370	0.413	0.471	0.526	0.571	0.689	---
1. At 100% travel.																

1. At 100% travel.

Table 39. Fisher HPS, CL900, 1500, and 2500 (Micro-Flute Valve Plug, Flow Up through the Port)

HPS, CL900, 1500, and 2500, Micro-Flute, Flow Up																Equal Percentage Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	6.4 1 Flute	0.25 1 Flute	19	0.75	C _V	0.039	0.046	0.056	0.072	0.094	0.124	0.162	0.212	0.278	0.354	0.87
					K _V	0.034	0.040	0.048	0.062	0.081	0.107	0.140	0.183	0.240	0.306	---
					X _T	0.778	0.734	0.690	0.653	0.642	0.635	0.637	0.634	0.632	0.656	---
	6.4 3 Flutes	0.25 3 Flutes	19	0.75	C _V	0.053	0.073	0.101	0.146	0.216	0.312	0.433	0.588	0.802	1.07	0.90
					K _V	0.046	0.063	0.087	0.126	0.187	0.270	0.375	0.509	0.694	0.926	---
					X _T	0.692	0.648	0.639	0.625	0.600	0.586	0.597	0.613	0.620	0.624	---
	12.7	0.5	19	0.75	C _V	0.105	0.184	0.314	0.488	0.716	1.04	1.53	2.30	3.20	4.21	0.84
					K _V	0.091	0.159	0.272	0.422	0.619	0.900	1.32	1.99	2.77	3.64	---
					X _T	0.974	0.792	0.654	0.638	0.630	0.580	0.547	0.497	0.523	0.549	---
1. At 100% travel.																

Table 40. Fisher HPS, CL900 and 1500, (Micro-Form Valve Plug, Flow Up through the Port)

HPS, CL900 and 1500, Micro-Form, Flow Up															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	6.4	0.25	19	0.75	C _V	0.072	0.102	0.138	0.209	0.309	0.438	0.630	0.894	1.22	1.61	0.96
					K _V	0.062	0.088	0.119	0.181	0.267	0.379	0.545	0.773	1.06	1.39	---
					X _T	0.972	0.971	0.986	0.792	0.668	0.611	0.611	0.609	0.606	0.610	---
	12.7	0.5	19	0.75	C _V	0.269	0.404	0.555	0.738	1.03	1.52	2.18	3.10	4.23	5.39	0.97
					K _V	0.233	0.349	0.480	0.638	0.891	1.31	1.89	2.68	3.66	4.66	---
					X _T	0.789	0.708	0.702	0.650	0.626	0.572	0.583	0.606	0.646	0.713	---
	19.1	0.75	19	0.75	C _V	0.384	0.577	0.941	1.39	2.02	2.93	4.40	6.58	8.45	9.61	0.95
					K _V	0.332	0.499	0.814	1.20	1.75	2.53	3.81	5.69	7.31	8.31	---
					X _T	0.532	0.774	0.714	0.587	0.579	0.584	0.588	0.607	0.672	0.773	---
2	6.4	0.25	19	0.75	C _V	0.072	0.102	0.138	0.209	0.309	0.438	0.630	0.894	1.22	1.61	0.96
					K _V	0.062	0.088	0.119	0.181	0.267	0.379	0.545	0.773	1.06	1.39	---
					X _T	0.972	0.971	0.986	0.792	0.668	0.611	0.611	0.609	0.606	0.610	---
	12.7	0.5	19	0.75	C _V	0.269	0.404	0.555	0.738	1.03	1.52	2.18	3.10	4.23	5.39	0.97
					K _V	0.233	0.349	0.480	0.638	0.891	1.31	1.89	2.68	3.66	4.66	---
					X _T	0.789	0.708	0.702	0.650	0.626	0.572	0.583	0.606	0.646	0.713	---
	19.1	0.75	19	0.75	C _V	0.450	0.713	1.07	1.52	2.12	3.05	4.57	6.87	9.66	11.9	0.93
					K _V	0.389	0.617	0.926	1.31	1.83	2.64	3.95	5.94	8.36	10.3	---
					X _T	0.740	0.640	0.578	0.589	0.636	0.648	0.612	0.589	0.636	0.718	---
1. At 100% travel.																

Table 41. Fisher HPS, CL2500, (Micro-Form Valve Plug, Flow Up through the Port)

HPS, CL2500, Micro-Form, Flow Up															Equal Percentage Characteristic	
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	6.4	0.25	19	0.75	C _V	0.072	0.102	0.138	0.209	0.309	0.438	0.630	0.894	1.22	1.61	0.96
					K _V	0.062	0.088	0.119	0.181	0.267	0.379	0.545	0.773	1.06	1.39	---
					X _T	0.972	0.971	0.986	0.792	0.668	0.611	0.611	0.609	0.606	0.610	---
	12.7	0.5	19	0.75	C _V	0.269	0.404	0.555	0.738	1.03	1.52	2.18	3.10	4.23	5.39	0.97
					K _V	0.233	0.349	0.480	0.638	0.891	1.31	1.89	2.68	3.66	4.66	---
					X _T	0.789	0.708	0.702	0.650	0.626	0.572	0.583	0.606	0.646	0.713	---
	19.1	0.75	19	0.75	C _V	0.384	0.577	0.941	1.39	2.02	2.93	4.40	6.58	8.45	9.61	0.95
					K _V	0.332	0.499	0.814	1.20	1.75	2.53	3.81	5.69	7.31	8.31	---
					X _T	0.532	0.774	0.714	0.587	0.579	0.584	0.588	0.607	0.672	0.773	---
2	6.4	0.25	19	0.75	C _V	0.062	0.095	0.137	0.209	0.309	0.438	0.630	0.894	1.22	1.61	0.96
					K _V	0.054	0.082	0.119	0.181	0.267	0.379	0.545	0.773	1.06	1.39	---
					X _T	0.972	0.971	0.986	0.792	0.668	0.611	0.611	0.609	0.606	0.610	---
	12.7	0.5	19	0.75	C _V	0.269	0.404	0.555	0.738	1.03	1.52	2.18	3.10	4.23	5.39	0.97
					K _V	0.233	0.349	0.480	0.638	0.891	1.31	1.89	2.68	3.66	4.66	---
					X _T	0.789	0.708	0.702	0.650	0.626	0.572	0.583	0.606	0.646	0.713	---
	19.1	0.75	19	0.75	C _V	0.450	0.713	1.07	1.52	2.12	3.05	4.57	6.87	9.66	11.9	0.93
					K _V	0.389	0.617	0.926	1.31	1.83	2.64	3.95	5.94	8.36	10.3	---
					X _T	0.740	0.640	0.578	0.589	0.636	0.648	0.612	0.589	0.636	0.718	---
1. At 100% travel.																

Table 42. Fisher HPS, CL900 and 1500, (Extended Travel Micro-Form Valve Plug, Flow Up through the Port)

HPS, CL900 and 1500, Extended Travel Micro-Form, Flow Up																Modified Equal Percentage Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coeffi- cient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	19.1	0.75	29	1.125	C _V	0.480	0.940	1.71	2.93	5.49	8.45	10.5	11.5	12.0	12.5	0.95
					K _V	0.415	0.813	1.48	2.53	4.75	7.31	9.08	9.95	10.4	10.8	---
					X _T	0.741	0.660	0.561	0.535	0.599	0.685	0.655	0.632	0.626	0.594	---
	25.4	1	29	1.125	C _V	0.85	1.73	3.22	5.71	8.81	11.6	13.7	15.5	16.5	17.1	0.85
					K _V	0.735	1.50	2.79	4.94	7.62	10.0	11.9	13.4	14.3	14.8	---
					X _T	0.741	0.660	0.561	0.535	0.600	0.685	0.699	0.632	0.626	0.594	---
2	25.4	1	29	1.125	C _V	0.884	1.67	2.86	4.96	9.08	15.6	20.9	23.0	23.9	24.2	0.92
					K _V	0.765	1.44	2.47	4.29	7.85	13.5	18.1	19.9	20.7	20.9	---
					X _T	0.696	0.700	0.698	0.700	0.696	0.700	0.697	0.745	0.714	0.700	---
	31.8	1.25	29	1.125	C _V	1.19	1.90	3.60	8.17	16.9	23.9	29.0	31.0	32.0	33.0	0.91
					K _V	1.03	1.64	3.11	7.07	14.6	20.7	25.1	26.8	27.7	28.5	---
					X _T	0.584	0.603	0.552	0.668	0.731	0.654	0.657	0.670	0.667	0.632	---
	38.1	1.5	38	1.5	C _V	1.98	3.83	7.96	16.0	27.2	37.4	43.3	46.9	51.5	52.2	0.97
					K _V	1.71	3.31	6.89	13.8	23.5	32.4	37.5	40.6	44.5	45.2	---
					X _T	0.584	0.603	0.554	0.668	0.731	0.654	0.682	0.691	0.634	0.632	---
1. At 100% travel.																

Table 43. Fisher HPS, CL2500, (Extended Travel Micro-Form Valve Plug, Flow Up through the Port)

HPS, CL2500, Extended Travel Micro-Form, Flow Up																Modified Equal Percentage Characteristic
Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										F _L ⁽¹⁾
	mm	Inches	mm	Inches		10	20	30	40	50	60	70	80	90	100	
1	19.1	0.75	29	1.125	C _v	0.480	0.940	1.71	2.93	5.49	8.45	10.5	11.5	12.0	12.5	0.95
					K _v	0.415	0.813	1.48	2.53	4.75	7.31	9.08	9.95	10.4	10.8	---
					X _T	0.741	0.660	0.561	0.535	0.599	0.685	0.655	0.632	0.626	0.594	---
	25.4	1	29	1.125	C _v	0.500	1.54	3.61	5.83	7.44	8.86	10.6	12.4	13.1	13.8	0.88
					K _v	0.433	1.33	3.12	5.04	6.44	7.66	9.17	10.7	11.3	11.9	---
					X _T	0.489	0.848	0.556	0.544	0.709	0.820	0.714	0.588	0.644	0.580	---
2	25.4	1	29	1.125	C _v	0.884	1.67	2.86	4.96	9.08	15.6	20.9	23.0	23.9	24.2	0.92
					K _v	0.765	1.44	2.47	4.29	7.85	13.5	18.1	19.9	20.7	20.9	---
					X _T	0.696	0.700	0.698	0.700	0.696	0.700	0.697	0.745	0.714	0.700	---
	31.8	1.25	29	1.125	C _v	1.19	1.90	3.60	8.17	16.9	23.9	29.0	31.0	32.0	33.0	0.91
					K _v	1.03	1.64	3.11	7.07	14.6	20.7	25.1	26.8	27.7	28.5	---
					X _T	0.584	0.603	0.552	0.668	0.731	0.654	0.657	0.670	0.667	0.632	---
	38.1	1.5	38	1.5	C _v	1.87	3.75	8.23	16.5	26.2	33.4	38.0	41.7	43.4	44.2	>0.96
					K _v	1.62	3.24	7.12	14.3	22.7	28.9	32.9	36.1	37.5	38.2	---
					X _T	0.609	0.515	0.520	0.626	0.751	0.790	0.718	0.653	0.668	0.644	---

1. At 100% travel.

Table 44. Fisher HPS, CL900, 1500, and 2500, (Whisper Trim III Cage, Flow Up through the Port)

HPS, Whisper Trim III--CL900 and 1500																	Linear Characteristic
Cage Level	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel										
		mm	Inches	mm	Inches		Minimum ⁽¹⁾	10	20	30	40	50	60	70	80	90	100
A1 ⁽²⁾ ΔP/P1≤0.6	2	47.6	1.875	38	1.5	C _V	1.00	2.50	7.50	12.8	17.7	22.3	26.6	31.2	35.5	39.5	42.6
						K _V	0.865	2.16	6.49	11.1	15.3	19.3	23.0	27.0	30.7	34.2	36.8
						X _T	0.718	0.68	0.60	0.60	0.61	0.60	0.61	0.60	0.60	0.60	0.60
	3	73.0	2.875	50	2	C _V	1.25	6.00	21.0	34.6	49.0	62.7	77.0	89.7	98.8	105	108
						K _V	1.08	5.19	18.2	29.9	42.4	54.2	66.6	77.6	85.5	90.8	93.4
						X _T	0.839	0.87	0.80	0.83	0.81	0.82	0.82	0.81	0.82	0.81	0.82
HPS, Whisper Trim III--CL2500																	Linear Characteristic
A1 ⁽²⁾ ΔP/P1≤0.6	2	47.6	1.875	38	1.5	C _V	---	3.1	8.4	13.1	17.3	21.4	25.1	28.3	30.8	32.9	34.9
						K _V	---	2.68	7.27	11.3	15.0	18.5	21.7	24.5	26.6	28.5	30.2
						X _T	0.718	0.68	0.60	0.61	0.60	0.61	0.60	0.60	0.60	0.60	0.60
HPS, Whisper Trim III--CL900 and 1500																	Linear Characteristic
B1 ΔP/P1≤.75	3	73.0	2.875	50	2	C _V	0.900	3.00	9.00	14.0	18.6	23.4	28.6	34.7	40.0	45.0	48.7
						K _V	0.778	2.59	7.79	12.1	16.1	20.2	24.7	30.0	34.6	38.9	42.1
						X _T	0.622	0.62	0.62	0.63	0.62	0.62	0.63	0.62	0.63	0.62	0.63
1. Valve should not be required to throttle at less than the minimum coefficient for an extended time, or erosion damage to the valve seat may result. 2. Larger capacities may be available with level A1 cages depending on service conditions.																	

1. Valve should not be required to throttle at less than the minimum coefficient for an extended time, or erosion damage to the valve seat may result.

2. Larger capacities may be available with level A1 cages depending on service conditions.

Table 45. Fisher HPS and HPT, CL900, 1500, and 2500, (Cavitrol III Cages, Standard Seat Design, Flow Down through the Port)

HPS and HPT, CL900, 1500, and 2500, Cavitrol III, Flow Down																	Linear Characteristic	
Trim Stage	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Minimum Throttling $C_v^{(2)}$	Valve Opening—Percent of Total Travel										$F_L^{(3)}$
		mm	Inches	mm	Inches			10	20	30	40	50	60	70	80	90	100	
Two Stage	1 ⁽¹⁾	22.2	0.875 ⁽¹⁾	38	1.5	C_v	0.360	0.163	0.836	1.80	2.74	3.64	4.51	5.36	6.18	6.91	7.39	0.98
						K_v	0.311	0.141	0.723	1.56	2.37	3.15	3.90	4.64	5.35	5.98	6.39	---
	2	44.4	1.75	50	2	C_v	0.580	1.07	1.97	3.29	4.86	6.58	8.36	10.1	11.7	13.0	14.0	0.98
						K_v	0.502	0.926	1.70	2.85	4.20	5.69	7.23	8.74	10.1	11.2	12.1	---
Three Stage	2 ⁽¹⁾	25.4	1 ⁽¹⁾	50	2	C_v	0.590	0.272	1.10	1.98	2.82	3.63	4.46	5.30	6.07	6.61	6.73	0.99
						K_v	0.510	0.235	0.952	1.71	2.44	3.14	3.86	4.58	5.25	5.72	5.82	---
HPS and HPT, CL900 and 1500, Cavitrol III, Flow Down																	Linear Characteristic	
Two Stage	3	63.5	2.5	64	2.5	C_v	0.720	1.46	4.98	9.24	13.2	17.0	20.7	24.7	28.5	31.9	34.4	0.98
						K_v	0.623	1.26	4.31	7.99	11.4	14.7	17.9	21.4	24.7	27.6	29.8	---
	4	87.3	3.4375	76	3	C_v	0.900	2.61	9.01	15.6	21.8	28.3	34.8	40.4	46.4	52.2	58.1	0.98
						K_v	0.778	2.26	7.79	13.5	18.9	24.5	30.1	34.9	40.1	45.2	50.3	---
	6	133.3	5.25	102	4	C_v	1.72	7.50	20.7	33.8	47.0	60.1	73.3	87.0	100	112	123	0.98
						K_v	1.49	6.49	17.9	29.2	40.7	52.0	63.4	75.3	86.5	96.9	106	---
Three Stage	3	47.6	1.875	64	2.5	C_v	1.20	0.747	2.02	3.92	6.15	8.01	9.50	11.0	12.8	14.9	16.5	0.99
						K_v	1.04	0.646	1.75	3.39	5.32	6.93	8.22	9.52	11.1	12.9	14.3	---
	4	73.0	2.875	76	3	C_v	1.70	2.80	5.50	8.30	11.0	13.9	16.7	19.4	22.2	25.0	27.8	0.99
						K_v	1.47	2.42	4.76	7.18	9.52	12.0	14.4	16.8	19.2	21.6	24.0	---
	6	115.9	4.5625	102	4	C_v	3.10	6.10	13.2	19.8	26.1	34.1	41.5	48.2	54.5	60.9	65.0	0.99
						K_v	2.68	5.28	11.4	17.1	22.6	29.5	35.9	41.7	47.1	52.7	56.2	---
1. Cavitrol III trim in the NPS 1, two stage and the NPS 2, three stage are unbalanced valve plugs. These sizes and constructions are HPS valves; all others in this table are HPT valves. 2. Valves should not be required to throttle at a C_v less than the specified minimum C_v for an extended period. Erosion damage to the valve seats may result. 3. At 100% travel.																		

Table 46. Fisher HPT, CL900, CL1500, Cavitrol III, Protected Inside Seat Design, Flow Down

HPT, CL900 and 1500, Cavitrol III, Protected Inside Seat Design, Flow Down																	Linear Characteristic
Trim Stage	Valve Size, NPS	Port Diameter		Maximum Travel		Flow Coefficient	Minimum Throttling C_v	Valve Opening - Percent of Total Travel									
		mm	Inch	mm	Inch			10	20	30	40	50	60	70	80	90	100
Two Stage	2 ⁽¹⁾	29.4	1.159	50	2	C_v	0.58	0.03	1.7	3.5	5.2	6.8	8.3	9.7	10.9	12	12.9
						K_v	0.502	0.026	1.47	3	4.5	5.9	7.2	8.4	9.4	10.4	11.1
	3	48.5	1.909	64	2.5	C_v	0.72	0.05	4.4	8.3	12.2	15.9	19.4	22.8	26	28.9	31.5
						K_v	0.623	0.04	3.8	7.2	10.5	13.7	16.8	19.7	22.5	25	27.2
	4	72.3	2.847	76	3	C_v	0.9	1.6	7.9	14.1	20.3	26.3	32.3	38	43.7	49.1	54
						K_v	0.778	1.4	6.8	12.2	17.5	22.7	27.9	32.8	37.8	42.4	46.6
	6	118.3	4.659	102	4	C_v	1.72	6.1	19.4	32.6	45.7	58.7	71.4	84	96.4	108.4	119.6
						K_v	1.49	5.3	16.8	28.2	39.5	50.7	61.7	72.6	83.3	93.6	103.3
Three Stage	3	32.6	1.284	64	2.5	C_v	1.2	0.07	3	4.7	6.1	7.5	8.9	10.2	11.8	13.5	14.8
						K_v	1.04	0.06	2.6	4.1	5.3	6.5	7.7	8.8	10.2	11.7	12.8
	4	58	2.284	76	3	C_v	1.7	2.7	5	8.2	11.9	14	17.8	20.2	22.1	25.6	27.3
						K_v	1.47	2.3	4.3	7.1	10.3	12.1	15.4	17.5	19.1	22.1	23.6
	6	100.9	3.972	102	4	C_v	3.1	4.7	12	19.3	26.6	31.8	37.4	44.5	51.5	58.5	61.9
						K_v	2.68	4.1	10.4	16.7	23	27.5	32.3	38.4	44.5	50.5	53.5

1. Also CL2500

Table 47. Fisher HPS, CL900, CL1500, CL2500, Cavitrol III 2-Stage Micro-Flat, Flow Down

HPS, CL900, CL1500, CL2500, Cavitrol III 2-Stage Micro-Flat, Flow Down																Linear Characteristic	
Valve Size, NPS	Shutoff Port Diameter ⁽²⁾		Maximum Travel		Flow Coefficient ⁽⁶⁾	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches		Min.	10	20	30	40	50	60	70	80	90	100	
1 ⁽³⁾	25.4	1	28.5	1.125	C _v	0.04	0.03	0.05	0.08	0.12	0.18	0.26	0.33	0.41	0.51	0.60	0.97
					K _v	0.03	0.03	0.04	0.07	0.10	0.16	0.22	0.29	0.35	0.44	0.52	
1 ⁽³⁾	25.4	1	38.1	1.5	C _v	0.04	0.04	0.07	0.12	0.21	0.30	0.41	0.53	0.68	0.84	1.02	0.97
					K _v	0.03	0.03	0.06	0.10	0.18	0.26	0.35	0.46	0.59	0.73	0.88	
1 ⁽⁵⁾	25.4	1	38.1	1.5	C _v	0.04	0.02	0.02	0.04	0.25	0.49	0.70	0.94	1.36	1.76	2.23	0.97
					K _v	0.03	0.02	0.02	0.03	0.22	0.42	0.61	0.81	1.18	1.52	1.93	
1 ⁽⁴⁾	25.4	1	38.1	1.5	C _v	0.05	0.02	0.16	0.45	0.95	1.47	2.00	2.50	3.10	3.70	4.10	0.97
					K _v	0.04	0.02	0.14	0.39	0.82	1.27	1.73	2.16	2.68	3.20	3.55	
2 ⁽³⁾	25.4	1	38.1	1.5	C _v	0.04	0.04	0.07	0.12	0.21	0.30	0.41	0.53	0.68	0.84	1.02	0.97
					K _v	0.03	0.03	0.06	0.10	0.18	0.26	0.35	0.46	0.59	0.73	0.88	
2 ⁽⁵⁾	25.4	1	38.1	1.5	C _v	0.04	0.02	0.02	0.04	0.25	0.49	0.70	0.94	1.36	1.76	2.23	0.97
					K _v	0.03	0.02	0.02	0.03	0.22	0.42	0.61	0.81	1.18	1.52	1.93	

1. At 100% travel
 2. Cavitrol III Micro-Flat trims use a shutoff port diameter which is larger than the flowing port diameter. Use the shutoff port diameter for actuator sizing.
 3. Flowing port: 12.7 mm / 0.5 Inch, Unbalanced Area: 5.065 cm² / 0.785 In², 1/2" stem
 4. Flowing port: 19 mm / 0.75 Inch, Unbalanced Area: 5.065 cm² / 0.785 In², 1/2" stem
 5. Flowing port: 19 mm / 0.75 Inch, Unbalanced Area: 5.065 cm² / 0.785 In², 3/4" stem
 6. In certain cases, the valve body size, port size, and travel may be the same, but the Cv might be different because of a different assembly part number.

Table 48. Fisher HPS, CL900, CL1500, CL2500, Cavitrol III 3-Stage Micro-Flat, Flow Down

HPS, CL900, CL1500, CL2500, Cavitrol III 3-Stage Micro-Flat, Flow Down																Linear Characteristic	
Valve Size, NPS	Shutoff Port Diameter ⁽²⁾		Maximum Travel		Flow Coefficient	Valve Opening—Percent of Total Travel											F _L ⁽¹⁾
	mm	Inches	mm	Inches		Min.	10	20	30	40	50	60	70	80	90	100	
2 ⁽³⁾	15.8	0.625	31.7	1.25	C _v	0.05	0.00	0.01	0.03	0.11	0.19	0.28	0.36	0.44	0.53	0.62	0.97
					K _v	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2 ⁽⁴⁾	25.4	1	38.1	1.5	C _v	0.05	0.01	0.06	0.09	0.16	0.34	0.46	0.62	0.89	1.06	1.18	0.97
					K _v	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2 ⁽⁵⁾	25.4	1	63.5	2.5	C _v	0.06	0.01	0.14	0.37	0.72	1.20	1.86	2.75	3.74	4.53	5.54	0.97
					K _v	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

1. At 100% travel
 2. Cavitrol III Micro-Flat trims use a shutoff port diameter which is larger than the flowing port diameter. Use the shutoff port diameter for actuator sizing.
 3. Flowing port: 9.5 mm / 0.375 Inch (Unbalanced Area: 1.96 cm² / 0.307 In², 3/4" stem
 4. Flowing port: 12.7 mm / 0.5 Inch (Unbalanced Area: 5.065 cm² / 0.785 In², 3/4" stem
 5. Flowing port: 19 mm / 0.75 Inch (Unbalanced Area: 5.065 cm² / 0.785 In², 3/4" stem

Product Bulletin

51.2:HP
December 2011

HP Valve
D101635X012

Neither Emerson, Emerson Process Management, nor any of their affiliated entities assumes responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use, and maintenance of any product remains solely with the purchaser and end user.

Fisher, FIELDVUE, WhisperFlo, Cavitrol, Whisper Trim, and ENVIRO-SEAL are marks owned by one of the companies in the Emerson Process Management business division of Emerson Electric Co. Emerson Process Management, Emerson, and the Emerson logo are trademarks and service marks of Emerson Electric Co. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available upon request. We reserve the right to modify or improve the designs or specifications of such products at any time without notice.

Emerson Process Management

Marshalltown, Iowa 50158 USA
Sorocaba, 18087 Brazil
Chatham, Kent ME4 4QZ UK
Dubai, United Arab Emirates
Singapore 128461 Singapore

www.Fisher.com